

TABLE OF CONTENTS

| | |
|--------------------------------|-------|
| Sendust Core series..... | 01 |
| Sendust Cores / KS | 02~08 |
| Sendust Plus Cores / KSP | 09~13 |
| Super Sendust Cores / KSH..... | 14~20 |
| Si-Fe Cores / KSF | 21~27 |




General Information


| Core Materials | Core Loss | Perm.vs DC Bias | Frequency Range | Curie Temp. | Flux Density (Sat.) | Temp. Stability |
|----------------|-----------|-----------------|-----------------|-------------|---------------------|-----------------|
| Sendust | Low | Good | 2MHz | 600°C | 10,500G | Good |
| Sendust Plus | Low | Better | 1MHz | 500°C | 12,000G | Best |
| Super Sendust | Low | Better | 1MHz | 650°C | 12,000G | Good |
| Si-Fe | Medium | Best | 1MHz | 700°C | 16,000G | Best |

※ All test results are based on permeability of 60 μ .

Percent Change of Permeability vs.DC Magnetizing Force

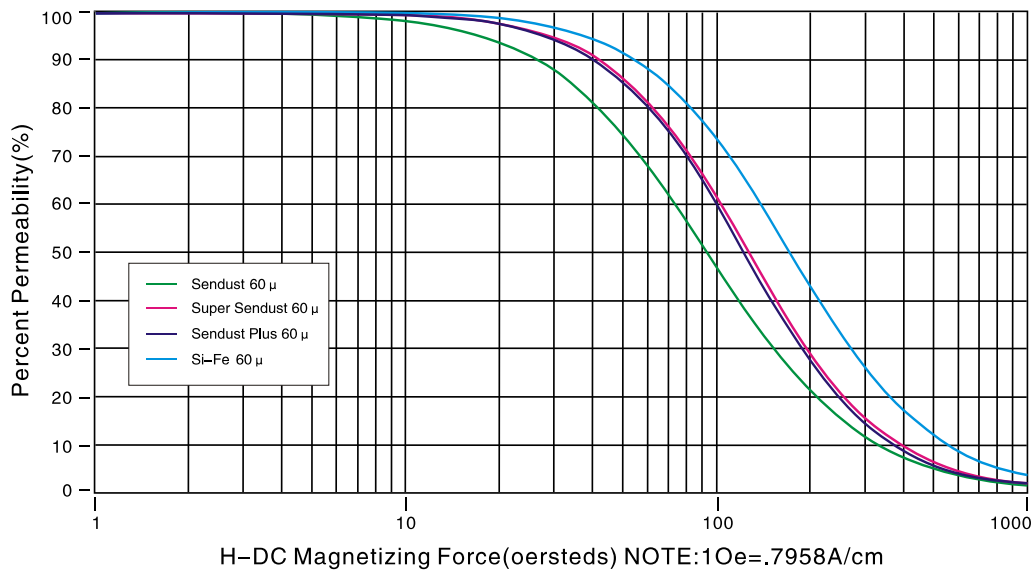

Core Loss Curve

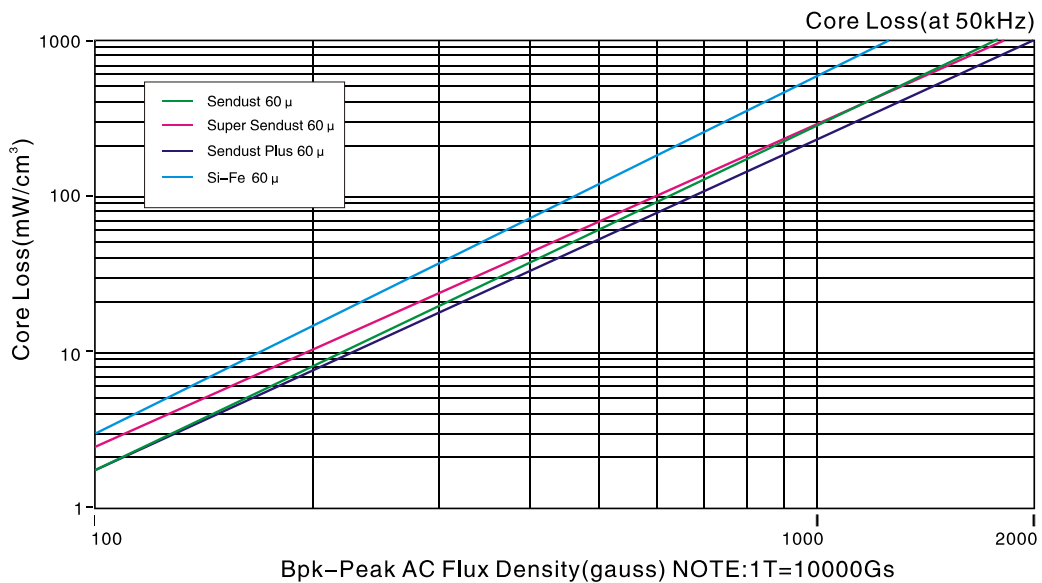

Sendust Cores (KS)

MAIN FEATURES


- Lower Core Losses than Iron Powder Cores
- Near Zero Magnetostriction
- Relatively High Saturation Flux Density (10,500 Gauss)

MAIN APPLICATIONS


- PC Power Supply
- Power Adapter
- Uninterruptible Power Supply
- Active Power Filter/Static Var Generator



Percent Change of Permeability vs. DC Magnetizing Force

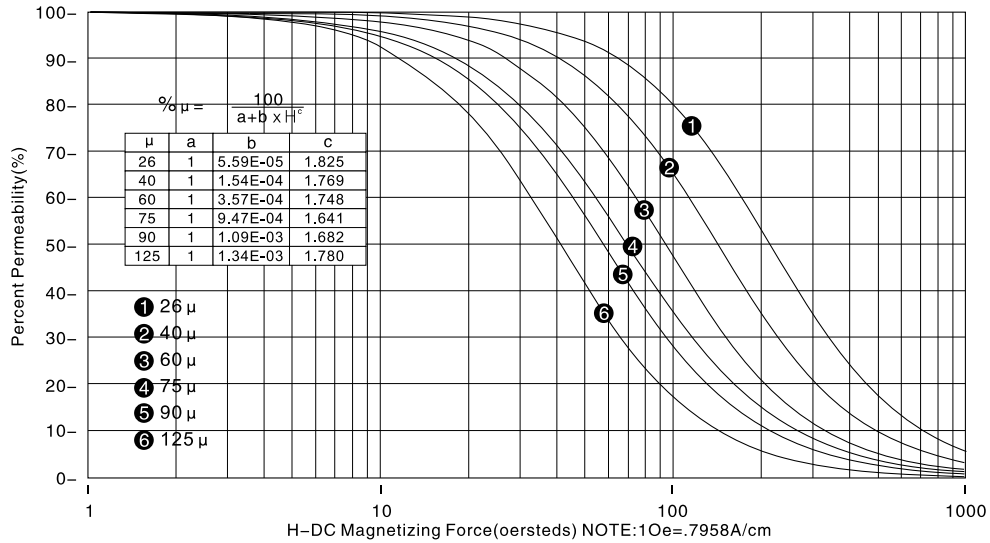


Typical Core Loss Curves(26 μ ,40 μ)

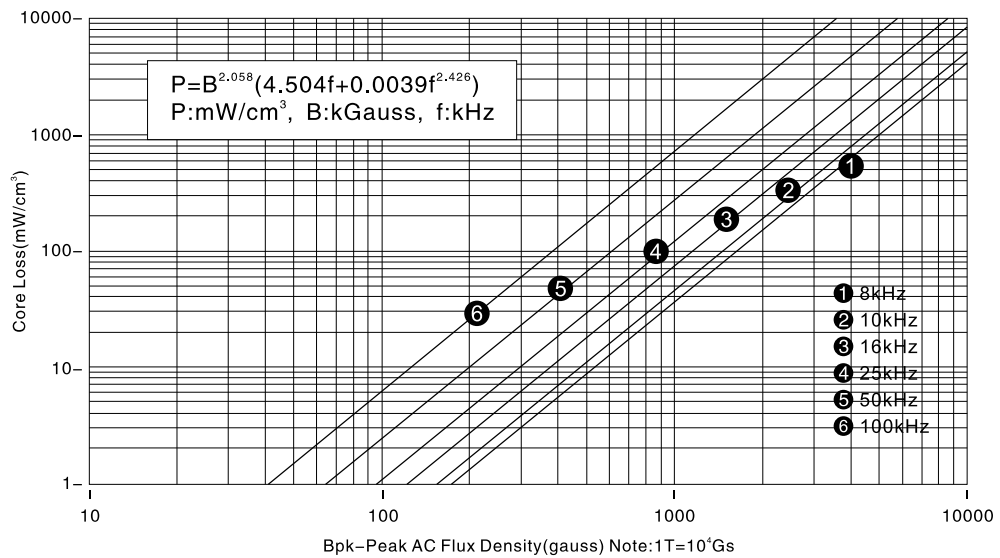


Sendust Cores (KS)

Typical Core Loss Curves(60 μ ,75 μ ,90 μ ,125 μ)

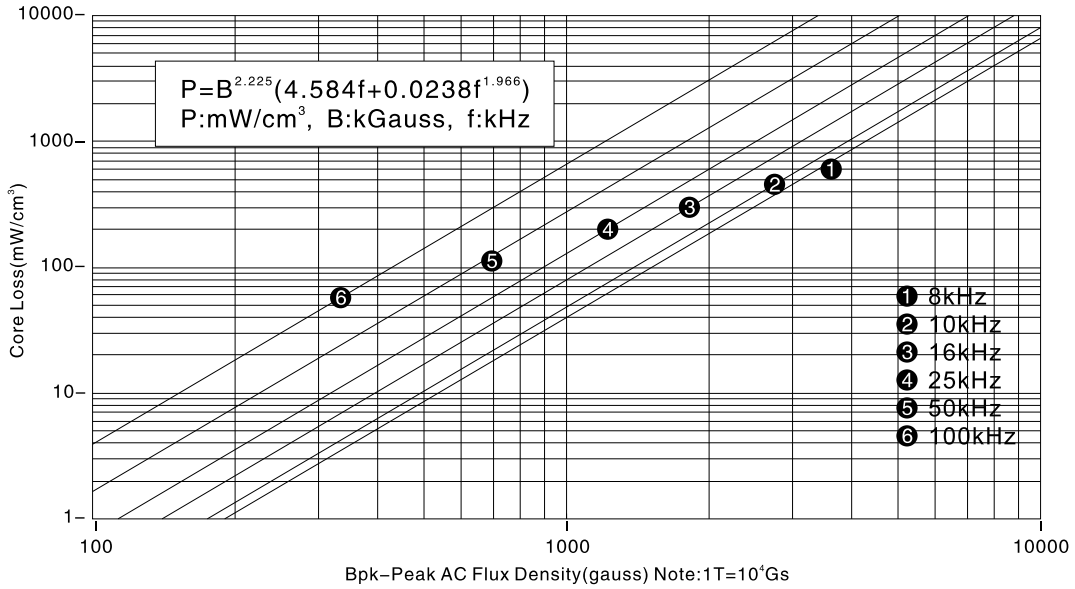


Permeability vs. Frequency

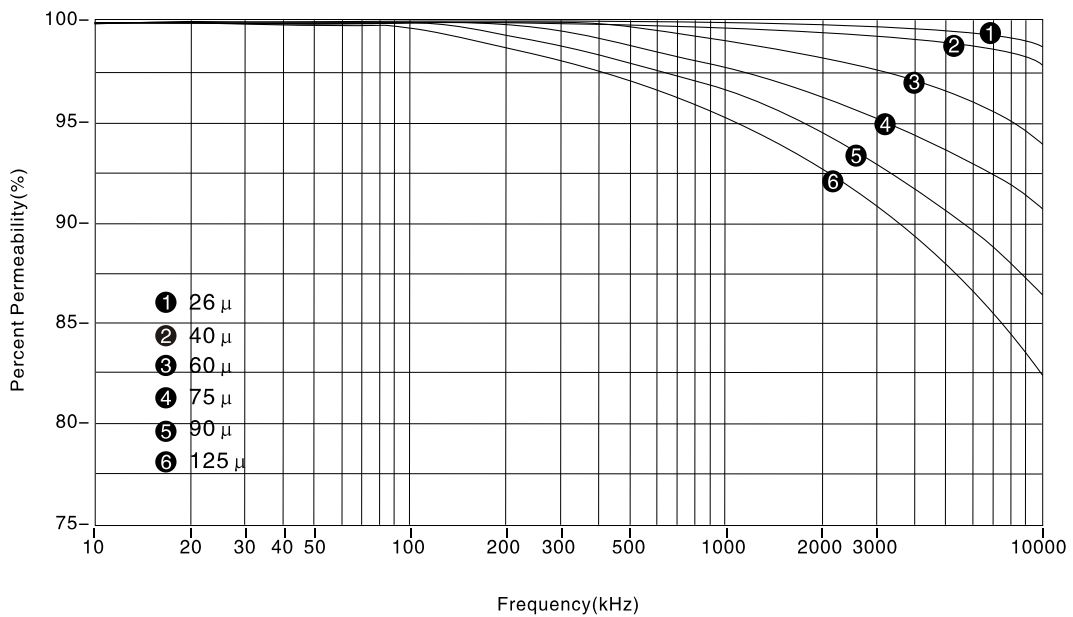


Sendust Cores (KS)

Normal Magnetization Curves

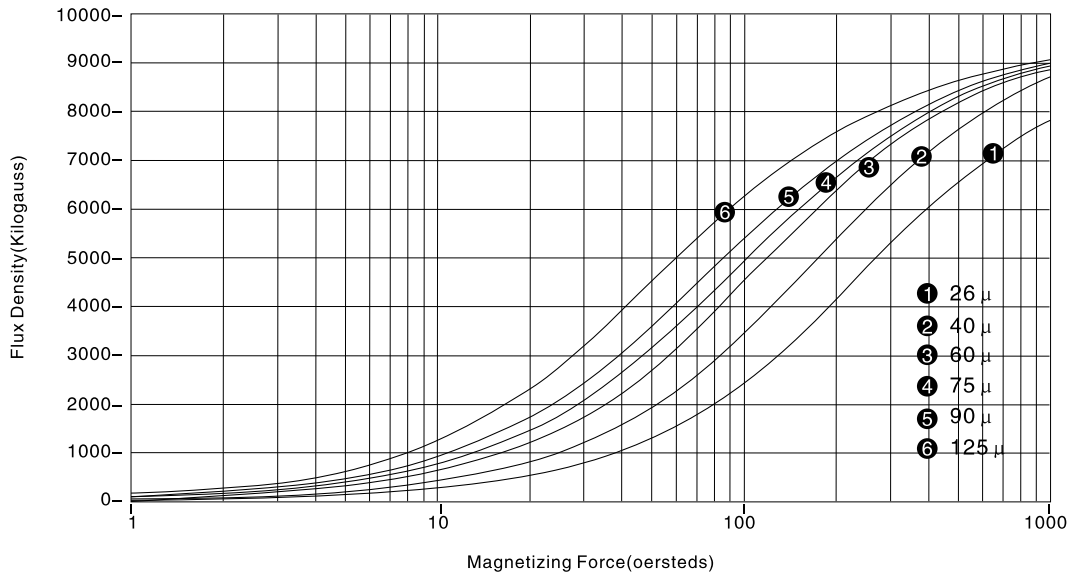

Temperature Stability

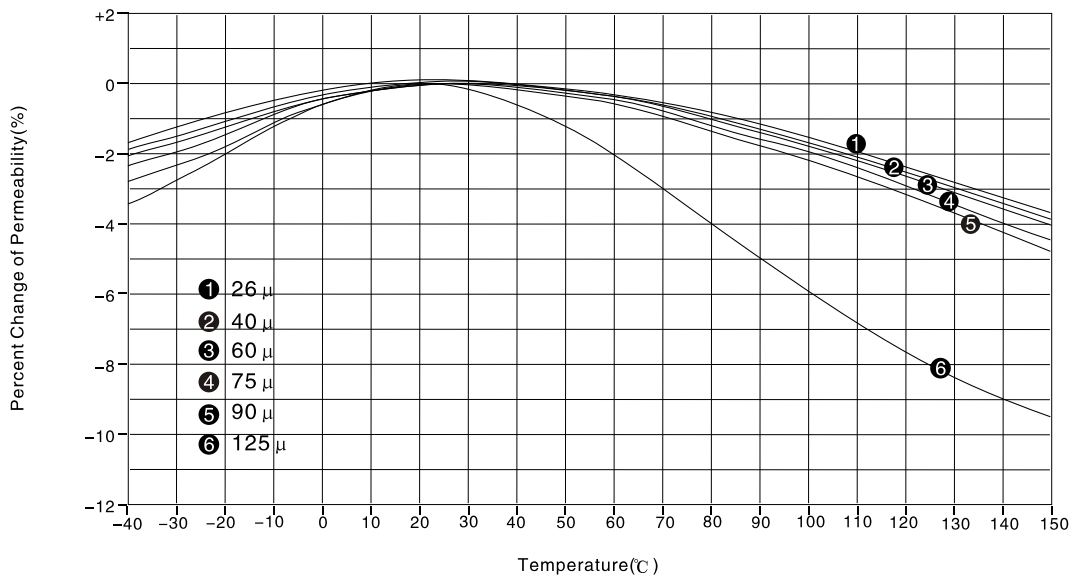

Sendust Cores (KS)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|-----------------|---|---------------------------------------|---------------------------------------|--------------------------------|-------------------|
| | | | | | | | OD (max) × ID (min) × HT (max) | Before Coating |
| KS050-026A | 26 | 12 | 1.229 /3.120 | 0.0177 /0.114 | 0.022 /0.356 | 0.0594 /0.383 | 12.70×7.62×4.75 | 13.46×6.99×5.51 |
| KS050-060A | 60 | 27 | | | | | | |
| KS050-075A | 75 | 34 | | | | | | |
| KS050-090A | 90 | 40 | | | | | | |
| KS050-125A | 125 | 56 | | | | | | |
| KS065-026A | 26 | 15 | 1.619 /4.110 | 0.0298 /0.192 | 0.048 /0.789 | 0.1105 /0.713 | 16.50×10.20×6.35 | 17.40×9.53×7.11 |
| KS065-060A | 60 | 35 | | | | | | |
| KS065-075A | 75 | 43 | | | | | | |
| KS065-090A | 90 | 52 | | | | | | |
| KS065-125A | 125 | 72 | | | | | | |
| KS068-026A | 26 | 19 | 1.630 /4.140 | 0.0360 /0.232 | 0.059 /0.960 | 0.0990 /0.638 | 17.30×9.65×6.35 | 18.03×9.02×7.11 |
| KS068-060A | 60 | 43 | | | | | | |
| KS068-075A | 75 | 53 | | | | | | |
| KS068-090A | 90 | 64 | | | | | | |
| KS068-125A | 125 | 89 | | | | | | |
| KS080-026A | 26 | 14 | 2.010 /5.090 | 0.0350 /0.226 | 0.070 /1.150 | 0.1772 /1.140 | 20.30×12.70×6.35 | 21.10×12.07×7.11 |
| KS080-060A | 60 | 32 | | | | | | |
| KS080-075A | 75 | 41 | | | | | | |
| KS080-090A | 90 | 49 | | | | | | |
| KS080-125A | 125 | 68 | | | | | | |
| KS090-026A | 26 | 19 | 2.230 /5.670 | 0.0513 /0.331 | 0.114 /1.880 | 0.2181 /1.410 | 22.90×14.07×7.62 | 23.62×13.39×8.38 |
| KS090-060A | 60 | 43 | | | | | | |
| KS090-075A | 75 | 54 | | | | | | |
| KS090-090A | 90 | 65 | | | | | | |
| KS090-125A | 125 | 90 | | | | | | |
| KS092-026A | 26 | 22 | 2.320 /5.880 | 0.0610 /0.388 | 0.142 /2.280 | 0.2307 /1.490 | 23.60×14.40×8.89 | 24.30×13.77×9.70 |
| KS092-060A | 60 | 51 | | | | | | |
| KS092-075A | 75 | 63 | | | | | | |
| KS092-090A | 90 | 76 | | | | | | |
| KS092-125A | 125 | 105 | | | | | | |
| KS106-026A | 26 | 32 | 2.500 /6.350 | 0.1014 /0.654 | 0.254 /4.150 | 0.2419 /1.560 | 26.90×14.70×11.20 | 27.70×14.10×11.99 |
| KS106-060A | 60 | 75 | | | | | | |
| KS106-075A | 75 | 94 | | | | | | |
| KS106-090A | 90 | 113 | | | | | | |
| KS106-125A | 125 | 157 | | | | | | |
| KS107-026A | 26 | 22 | 2.501 /6.352 | 0.0770 /0.497 | 0.198 /3.155 | 0.2419 /1.561 | 26.90×14.70×8.64 | 27.70×14.10×9.45 |
| KS107-060A | 60 | 59 | | | | | | |
| KS107-075A | 75 | 74 | | | | | | |
| KS107-090A | 90 | 89 | | | | | | |
| KS107-125A | 125 | 123 | | | | | | |

Sendust Cores (KS)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|--|-------------------|
| | | | | | | | OD (max)×ID (min)×HT (max) Before Coating | After Coating |
| KS130-026A | 26 | 28 | 3.210 /8.150 | 0.1042 /0.672 | 0.334 /5.480 | 0.4537 /2.930 | 33.00×19.90×10.70 | 33.83×19.30×11.61 |
| KS130-060A | 60 | 61 | | | | | | |
| KS130-075A | 75 | 76 | | | | | | |
| KS130-090A | 90 | 91 | | | | | | |
| KS130-125A | 125 | 127 | | | | | | |
| KS131-026A | 26 | 22 | 3.207 /8.147 | 0.0854 /0.551 | 0.274 /4.490 | 0.4537 /2.927 | 33.00×19.90×8.76 | 33.83×19.30×9.70 |
| KS131-060A | 60 | 51 | | | | | | |
| KS131-075A | 75 | 64 | | | | | | |
| KS131-090A | 90 | 76.5 | | | | | | |
| KS131-125A | 125 | 109 | | | | | | |
| KS132-026A | 26 | 28 | 3.207 /8.147 | 0.1082 /0.698 | 0.347 /5.687 | 0.4537 /2.927 | 33.00×19.90×11.18 | 33.83×19.30×11.99 |
| KS132-060A | 60 | 65 | | | | | | |
| KS132-075A | 75 | 81 | | | | | | |
| KS132-090A | 90 | 97 | | | | | | |
| KS132-125A | 125 | 135 | | | | | | |
| KS135-026A | 26 | 16 | 3.530 /8.950 | 0.0704 /0.454 | 0.249 /4.060 | 0.6193 /4.010 | 34.30×23.40×8.89 | 35.10×22.56×9.83 |
| KS135-060A | 60 | 38 | | | | | | |
| KS135-075A | 75 | 47 | | | | | | |
| KS135-090A | 90 | 57 | | | | | | |
| KS135-125A | 125 | 79 | | | | | | |
| KS141-026A | 26 | 24 | 3.540 /8.980 | 0.1051 /0.678 | 0.372 /6.088 | 0.5648 /3.640 | 35.80×22.40×10.50 | 36.63×21.54×11.28 |
| KS141-060A | 60 | 56 | | | | | | |
| KS141-075A | 75 | 70 | | | | | | |
| KS141-090A | 90 | 84 | | | | | | |
| KS141-125A | 125 | 117 | | | | | | |
| KS157-026A | 26 | 35 | 3.880 /9.840 | 0.1662 /1.072 | 0.645 /10.500 | 0.6619 /4.270 | 39.90×24.10×14.50 | 40.72×23.30×15.37 |
| KS157-060A | 60 | 81 | | | | | | |
| KS157-075A | 75 | 101 | | | | | | |
| KS157-090A | 90 | 121 | | | | | | |
| KS157-125A | 125 | 168 | | | | | | |
| KS158-026A | 26 | 53 | 0.374 /9.510 | 0.060 /1.537 | 0.592 /15.043 | 0.5500 /3.550 | 40.13×22.08×17.00 | 40.94×21.27×17.89 |
| KS158-060A | 60 | 122 | | | | | | |
| KS158-075A | 75 | 152 | | | | | | |
| KS158-090A | 90 | 183 | | | | | | |
| KS158-125A | 125 | 254 | | | | | | |
| KS168-026A | 26 | 47 | 4.040 /10.216 | 0.229 /1.475 | 0.960 /15.741 | 0.5648 /3.644 | 42.90×24.20×16.26 | 44.00×23.30×17.16 |
| KS168-060A | 60 | 108 | | | | | | |
| KS168-075A | 75 | 135 | | | | | | |
| KS168-090A | 90 | 161 | | | | | | |
| KS168-125A | 125 | 224 | | | | | | |

Sendust Cores (KS)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|--------------------------------|-------------------|
| | | | | | | | OD (max) × ID (min) × HT (max) | Before Coating |
| KS184-026A | 26 | 59 | 4.230 /10.740 | 0.308 /1.990 | 1.300 /21.300 | 0.6619 /4.270 | 46.70×24.10×18.00 | 47.63×23.32×18.92 |
| KS184-060A | 60 | 135 | | | | | | |
| KS184-075A | 75 | 169 | | | | | | |
| KS184-090A | 90 | 202 | | | | | | |
| KS184-125A | 125 | 281 | | | | | | |
| KS185-026A | 26 | 37 | 4.580 /11.630 | 0.208 /1.340 | 0.953 /15.530 | 0.6469 /6.110 | 46.70×28.70×15.20 | 47.63×27.89×16.13 |
| KS185-060A | 60 | 86 | | | | | | |
| KS185-075A | 75 | 107 | | | | | | |
| KS185-090A | 90 | 128 | | | | | | |
| KS185-125A | 125 | 178 | | | | | | |
| KS200-026A | 26 | 32 | 5.020 /12.730 | 0.194 /1.251 | 0.974 /15.930 | 1.165 /7.500 | 50.80×31.80×13.50 | 51.69×30.94×14.35 |
| KS200-060A | 60 | 73 | | | | | | |
| KS200-075A | 75 | 91 | | | | | | |
| KS200-090A | 90 | 109 | | | | | | |
| KS200-125A | 125 | 152 | | | | | | |
| KS225-026A | 26 | 33 | 5.630 /14.300 | 0.224 /1.444 | 12.260 /20.650 | 1.470 /9.480 | 57.20×35.60×14.00 | 58.00×34.70×14.86 |
| KS225-060A | 60 | 75 | | | | | | |
| KS225-075A | 75 | 94 | | | | | | |
| KS225-090A | 90 | 112 | | | | | | |
| KS225-125A | 125 | 156 | | | | | | |
| KS226-026A | 26 | 60 | 4.930 /12.500 | 0.355 /2.290 | 1.750 /28.600 | 0.796 /5.140 | 57.20×26.40×15.20 | 58.00×25.60×16.10 |
| KS226-060A | 60 | 138 | | | | | | |
| KS226-075A | 75 | 175 | | | | | | |
| KS226-090A | 90 | 207 | | | | | | |
| KS226-125A | 125 | 287 | | | | | | |
| KS250-026A | 26 | 83 | 5.660 /14.370 | 0.570 /3.675 | 3.223 /52.810 | 1.198 /7.730 | 62.00×32.60×25.00 | 63.10×31.37×26.27 |
| KS250-060A | 60 | 192 | | | | | | |
| KS250-075A | 75 | 240 | | | | | | |
| KS250-090A | 90 | 288 | | | | | | |
| KS250-125A | 125 | 400 | | | | | | |
| KS268-026A | 26 | 62 | 6.429 /16.330 | 0.481 /3.104 | 3.093 /50.690 | 1.491 /9.620 | 68.00×36.00×20.00 | 69.40×34.70×21.40 |
| KS268-060A | 60 | 143 | | | | | | |
| KS268-075A | 75 | 179 | | | | | | |
| KS268-090A | 90 | 215 | | | | | | |
| KS268-125A | 125 | 298 | | | | | | |
| KS290-026A | 26 | 89 | 7.24 /18.380 | 0.781 /5.040 | 5.653 /92.640 | 2.364 /15.250 | 74.80×45.30×35.00 | 75.20×44.07×36.27 |
| KS290-060A | 60 | 206 | | | | | | |
| KS290-075A | 75 | 257 | | | | | | |
| KS290-090A | 90 | 309 | | | | | | |
| KS290-125A | 125 | 429 | | | | | | |

Sendust Cores (KS)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|-------------------------|---------------------|
| | | | | | | | OD(max)×ID(min)×HT(max) | |
| | | | | | | | Before Coating | After Coating |
| KS300-026A | 26 | 30 | 7.72 /20.000 | 0.274 /1.770 | 2.115 /34.700 | 2.800 /17.990 | 77.80×49.20×12.70 | 78.90×48.20×13.84 |
| KS300-060A | 60 | 68 | | | | | | |
| KS300-075A | 75 | 85 | | | | | | |
| KS300-090A | 90 | 102 | | | | | | |
| KS300-125A | 125 | 142 | | | | | | |
| KS301-026A | 26 | 37 | 7.86 /19.950 | 0.352 /2.270 | 2.770 /45.300 | 2.800 /17.990 | 77.80×49.20×15.90 | 78.90×48.20×17.02 |
| KS301-060A | 60 | 85 | | | | | | |
| KS301-075A | 75 | 107 | | | | | | |
| KS301-090A | 90 | 128 | | | | | | |
| KS301-125A | 125 | 178 | | | | | | |
| KS400-026A | 26 | 48 | 9.56 /24.271 | 0.546 /3.523 | 5.217 /85.495 | 3.784 /24.413 | 101.60×57.15×16.51 | 103.12×55.75×17.78 |
| KS400-060A | 60 | 112 | | | | | | |
| KS400-075A | 75 | 137 | | | | | | |
| KS400-090A | 90 | 164 | | | | | | |
| KS400-125A | 125 | 228 | | | | | | |
| KS401-026A | 26 | 40 | 9.56 /24.271 | 0.461 /2.972 | 4.401 /72.122 | 3.784 /24.413 | 101.60×57.15×13.59 | 103.12×55.75×14.86 |
| KS401-060A | 60 | 92 | | | | | | |
| KS401-075A | 75 | 115 | | | | | | |
| KS401-090A | 90 | 139 | | | | | | |
| KS401-125A | 125 | 192 | | | | | | |
| KS520-026A | 26 | 54 | 12.77 /32.428 | 0.829 /5.347 | 10.580 /173.400 | 7.225 /46.612 | 132.54×78.59×20.32 | 133.96×77.04×21.72 |
| KS520-060A | 60 | 124 | | | | | | |
| KS520-075A | 75 | 155 | | | | | | |
| KS520-090A | 90 | 187 | | | | | | |
| KS520-125A | 125 | 259 | | | | | | |
| KS521-026A | 26 | 67.6 | 12.77 /32.429 | 1.040 /6.710 | 13.280 /217.580 | 7.225 /46.612 | 132.54×78.59×25.40 | 133.96×77.04×26.80 |
| KS521-060A | 60 | 156 | | | | | | |
| KS521-075A | 75 | 195 | | | | | | |
| KS521-090A | 90 | 234 | | | | | | |
| KS521-125A | 125 | 325 | | | | | | |
| KS650-026A | 26 | 160 | 15.22 /38.650 | 2.932 /18.920 | 44.620 /731.260 | 9.190 /59.310 | 165.00×88.90×50.80 | 167.20×86.90×52.90 |
| KS650-060A | 60 | 368 | | | | | | |
| KS650-075A | 75 | 460 | | | | | | |
| KS650-090A | 90 | 552 | | | | | | |
| KS651-026A | 26 | 78 | 16.22 /41.200 | 1.529 /9.870 | 63.085 /407.000 | 12.440 /80.300 | 165.00×102.40×31.75 | 166.50×101.00×33.15 |
| KS651-060A | 60 | 180 | | | | | | |
| KS651-075A | 75 | 225 | | | | | | |
| KS651-090A | 90 | 270 | | | | | | |

Sendust Plus Cores (KSP)

MAIN FEATURES


- Lower Core Losses than Super Sendust Cores
- Good DC-bias Characteristics
- Good Temperature Stability and Frequency Characteristics

MAIN APPLICATIONS


- Charging Pile
- PV Inverter
- Uninterruptible Power Supply



Percent Change of Permeability vs. DC Magnetizing Force

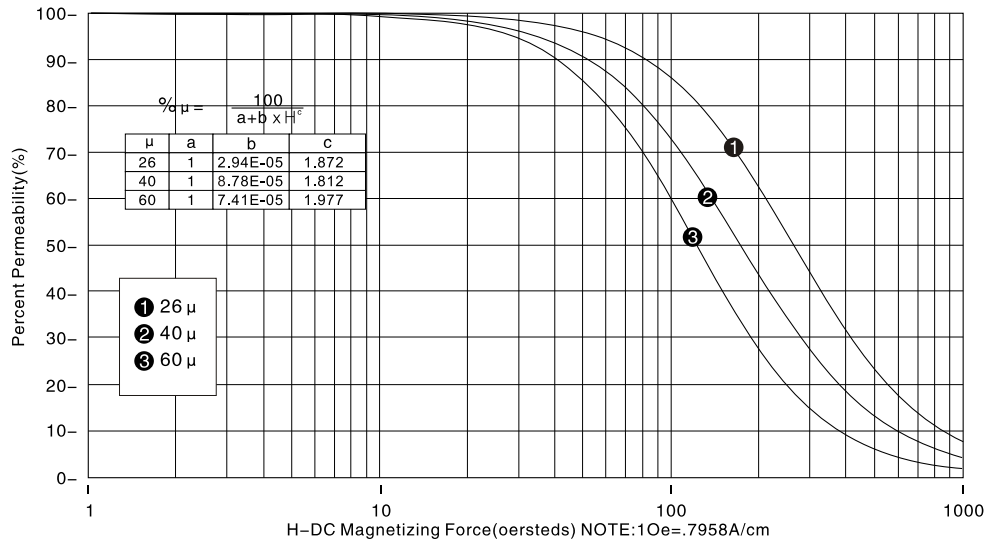


Typical Core Loss Curves (26 μ , 40 μ)

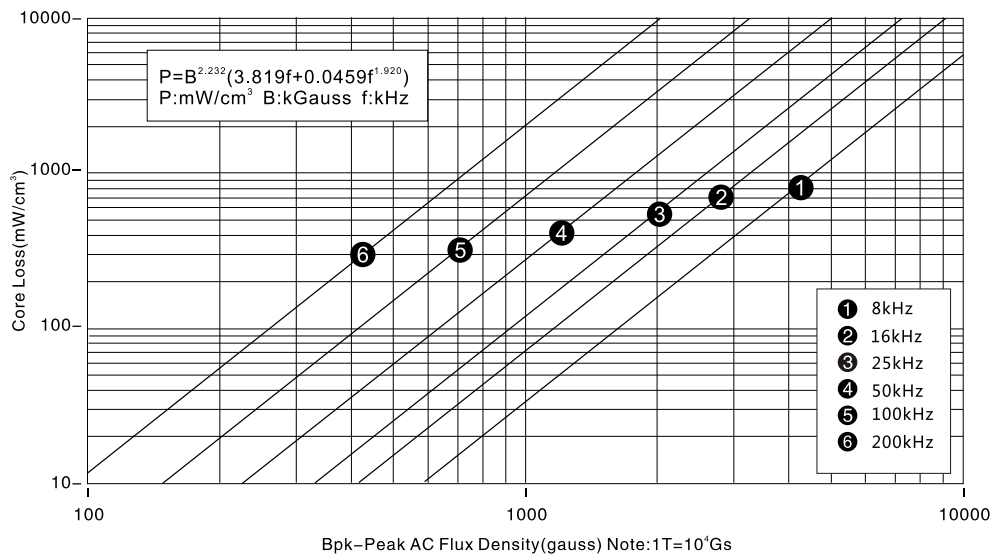


Sendust Plus Cores (KSP)

Typical Core Loss Curves(60 μ)

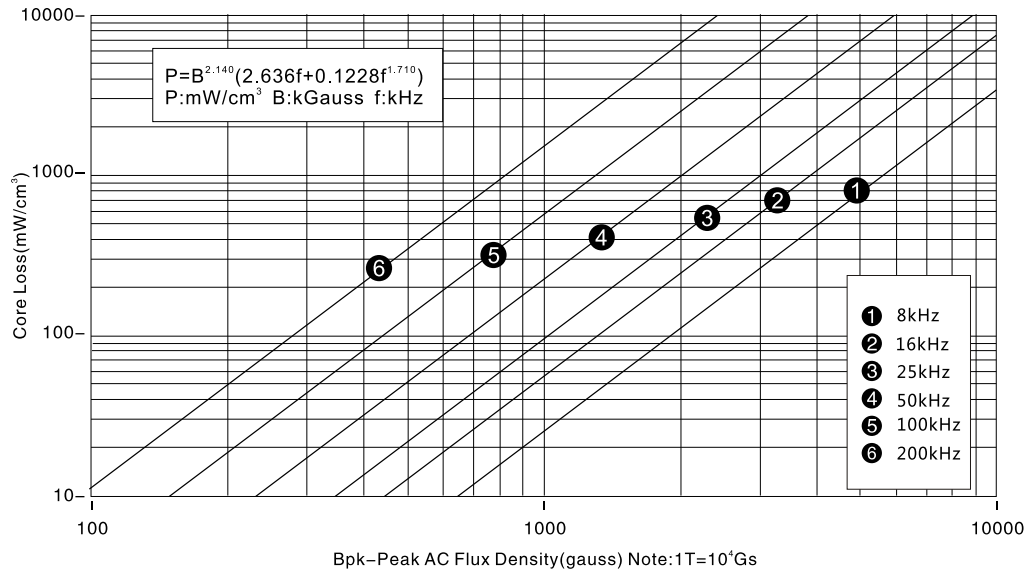


Permeability vs. Frequency

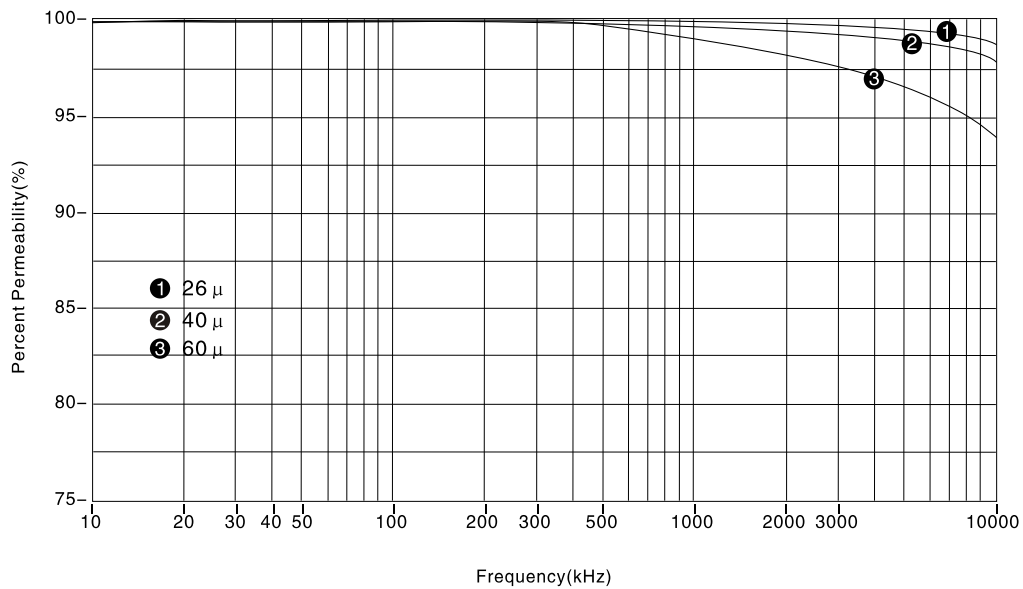


Sendust Plus Cores (KSP)

Normal Magnetization Curves

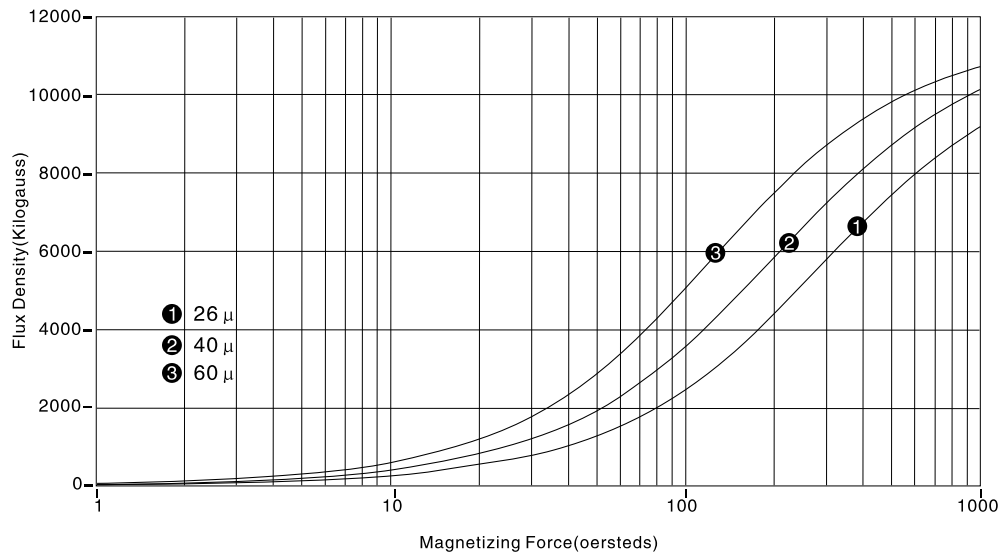

Temperature Stability

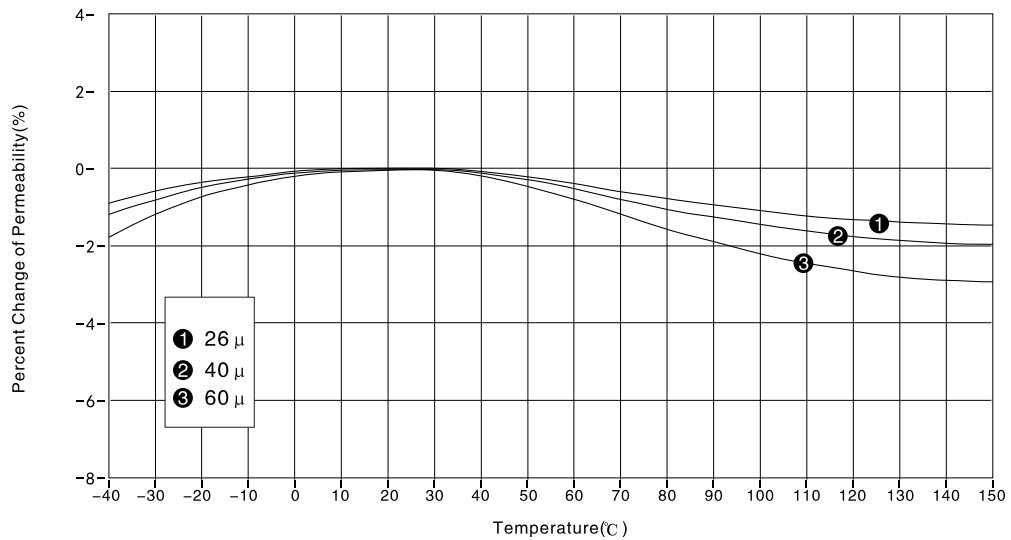

Sendust Plus Cores (KSP)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | ℓ_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|-------------------|---|---|---|---|-------------------|
| | | | | | | | OD(max)×ID(min)×HT(max) Before Coating | After Coating |
| KSP050-026A | 26 | 12 | 1.229 /3.120 | 0.0177 /0.114 | 0.022 /0.356 | 0.0594 /0.383 | 12.70×7.62×4.75 | 13.46×6.99×5.51 |
| KSP050-040A | 40 | 18 | | | | | | |
| KSP050-060A | 60 | 27 | | | | | | |
| KSP065-026A | 26 | 15 | 1.619 /4.110 | 0.0298 /0.192 | 0.048 /0.789 | 0.1105 /0.713 | 16.50×10.20×6.35 | 17.40×9.53×7.11 |
| KSP065-040A | 40 | 23 | | | | | | |
| KSP065-060A | 60 | 35 | | | | | | |
| KSP068-026A | 26 | 19 | 1.630 /4.140 | 0.0360 /0.232 | 0.059 /0.960 | 0.0990 /0.638 | 17.30×9.65×6.35 | 18.03×9.02×7.11 |
| KSP068-040A | 40 | 28 | | | | | | |
| KSP068-060A | 60 | 43 | | | | | | |
| KSP080-026A | 26 | 14 | 2.010 /5.090 | 0.0350 /0.226 | 0.070 /1.150 | 0.1772 /1.140 | 20.30×12.70×6.35 | 21.10×12.07×7.11 |
| KSP080-040A | 40 | 21 | | | | | | |
| KSP080-060A | 60 | 32 | | | | | | |
| KSP090-026A | 26 | 19 | 2.230 /5.670 | 0.0513 /0.331 | 0.114 /1.880 | 0.2181 /1.410 | 22.90×14.07×7.62 | 23.62×13.39×8.38 |
| KSP090-040A | 40 | 28 | | | | | | |
| KSP090-060A | 60 | 43 | | | | | | |
| KSP092-026A | 26 | 22 | 2.320 /5.880 | 0.0610 /0.388 | 0.142 /2.280 | 0.2307 /1.490 | 23.60×14.40×8.89 | 24.30×13.77×9.70 |
| KSP092-040A | 40 | 34 | | | | | | |
| KSP092-060A | 60 | 51 | | | | | | |
| KSP106-026A | 26 | 32 | 2.500 /6.350 | 0.1014 /0.654 | 0.254 /4.150 | 0.2419 /1.560 | 26.90×14.70×11.20 | 27.70×14.10×11.99 |
| KSP106-040A | 40 | 50 | | | | | | |
| KSP106-060A | 60 | 75 | | | | | | |
| KSP107-026A | 26 | 22 | 2.501 /6.352 | 0.0770 /0.497 | 0.198 /3.155 | 0.2419 /1.561 | 26.90×14.70×8.64 | 27.70×14.10×9.45 |
| KSP107-040A | 40 | 39 | | | | | | |
| KSP107-060A | 60 | 59 | | | | | | |
| KSP130-026A | 26 | 28 | 3.210 /8.150 | 0.1042 /0.672 | 0.334 /5.480 | 0.4537 /2.930 | 33.00×19.90×10.70 | 33.83×19.30×11.61 |
| KSP130-040A | 40 | 40 | | | | | | |
| KSP130-060A | 60 | 61 | | | | | | |
| KSP131-026A | 26 | 22 | 3.207 /8.147 | 0.0854 /0.551 | 0.274 /4.490 | 0.4537 /2.927 | 33.00×19.90×8.76 | 33.83×19.30×9.70 |
| KSP131-040A | 40 | 34 | | | | | | |
| KSP131-060A | 60 | 51 | | | | | | |
| KSP132-026A | 26 | 28 | 3.207 /8.147 | 0.1082 /0.698 | 0.347 /5.687 | 0.4537 /2.927 | 33.00×19.90×11.18 | 33.83×19.30×11.99 |
| KSP132-040A | 40 | 43 | | | | | | |
| KSP132-060A | 60 | 65 | | | | | | |
| KSP135-026A | 26 | 16 | 3.530 /8.950 | 0.0704 /0.454 | 0.249 /4.060 | 0.6193 /4.010 | 34.30×23.40×8.89 | 35.10×22.56×9.83 |
| KSP135-040A | 40 | 25 | | | | | | |
| KSP135-060A | 60 | 38 | | | | | | |
| KSP141-026A | 26 | 24 | 3.540 /8.980 | 0.1051 /0.678 | 0.372 /6.088 | 0.5648 /3.640 | 35.80×22.40×10.50 | 36.63×21.54×11.28 |
| KSP141-040A | 40 | 37 | | | | | | |
| KSP141-060A | 60 | 56 | | | | | | |

Sendust Plus Cores (KSP)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | ℓ_e in/cm | A_e in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) OD(max)×ID(min)×HT(max) | |
|-------------|--------------------|-----------------|-------------------|---|---|---|--|--------------------|
| | | | | | | | Before Coating | After Coating |
| KSP157-026A | 26 | 35 | 3.880 /9.840 | 0.1662 /1.072 | 0.645 /10.500 | 0.6619 /4.270 | 39.90×24.10×14.50 | 40.72×23.30×15.37 |
| KSP157-040A | 40 | 54 | | | | | | |
| KSP157-060A | 60 | 81 | | | | | | |
| KSP158-026A | 26 | 53 | 0.374 /9.510 | 0.060 /1.537 | 0.592 /15.043 | 0.5500 /3.550 | 40.13×22.08×17.00 | 40.94×21.27×17.89 |
| KSP158-040A | 40 | 81 | | | | | | |
| KSP158-060A | 60 | 122 | | | | | | |
| KSP168-026A | 26 | 47 | 4.040 /10.216 | 0.229 /1.475 | 0.960 /15.741 | 0.5648 /3.644 | 42.90×24.20×16.26 | 44.00×23.30×17.16 |
| KSP168-040A | 40 | 72 | | | | | | |
| KSP168-060A | 60 | 108 | | | | | | |
| KSP184-026A | 26 | 59 | 4.230 /10.740 | 0.308 /1.990 | 1.300 /21.300 | 0.6619 /4.270 | 46.70×24.10×18.00 | 47.63×23.32×18.92 |
| KSP184-040A | 40 | 90 | | | | | | |
| KSP184-060A | 60 | 135 | | | | | | |
| KSP185-026A | 26 | 37 | 4.580 /11.630 | 0.208 /1.340 | 0.953 /15.530 | 0.6469 /6.110 | 46.70×28.70×15.20 | 47.63×27.89×16.13 |
| KSP185-040A | 40 | 57 | | | | | | |
| KSP185-060A | 60 | 86 | | | | | | |
| KSP200-026A | 26 | 32 | 5.020 /12.730 | 0.194 /1.251 | 0.974 /15.930 | 1.165 /7.500 | 50.80×31.80×13.50 | 51.69×30.94×14.35 |
| KSP200-040A | 40 | 48 | | | | | | |
| KSP200-060A | 60 | 73 | | | | | | |
| KSP225-026A | 26 | 33 | 5.630 /14.300 | 0.224 /1.444 | 12.260 /20.650 | 1.470 /9.480 | 57.20×35.60×14.00 | 58.00×34.70×14.86 |
| KSP225-040A | 40 | 50 | | | | | | |
| KSP225-060A | 60 | 75 | | | | | | |
| KSP226-026A | 26 | 60 | 4.930 /12.500 | 0.355 /2.290 | 1.750 /28.600 | 0.796 /5.140 | 57.20×26.40×15.20 | 58.00×25.60×16.10 |
| KSP226-040A | 40 | 92 | | | | | | |
| KSP226-060A | 60 | 138 | | | | | | |
| KSP250-026A | 26 | 83 | 5.660 /14.370 | 0.570 /3.675 | 3.223 /52.810 | 1.198 /7.730 | 62.00×32.60×25.00 | 63.10×31.37×26.27 |
| KSP250-040A | 40 | 128 | | | | | | |
| KSP250-060A | 60 | 192 | | | | | | |
| KSP268-026A | 26 | 62 | 6.429 /16.330 | 0.481 /3.104 | 3.093 /50.690 | 1.491 /9.620 | 68.00×36.00×20.00 | 69.40×34.70×21.40 |
| KSP268-040A | 40 | 95 | | | | | | |
| KSP268-060A | 60 | 143 | | | | | | |
| KSP300-026A | 26 | 30 | 7.72 /20.000 | 0.274 /1.770 | 2.115 /34.700 | 2.800 /17.990 | 77.80×49.20×12.70 | 78.90×48.20×13.84 |
| KSP300-040A | 40 | 45 | | | | | | |
| KSP300-060A | 60 | 68 | | | | | | |
| KSP301-026A | 26 | 37 | 7.86 /19.950 | 0.352 /2.270 | 2.770 /45.300 | 2.800 /17.990 | 77.80×49.20×15.90 | 78.90×48.20×17.02 |
| KSP301-040A | 40 | 56 | | | | | | |
| KSP301-060A | 60 | 85 | | | | | | |
| KSP400-026A | 26 | 48 | 9.56 /24.271 | 0.546 /3.523 | 5.217 /85.495 | 3.784 /24.413 | 101.60×57.15×16.51 | 103.12×55.75×17.78 |
| KSP400-040A | 40 | 74 | | | | | | |
| KSP400-060A | 60 | 112 | | | | | | |

Super Sendust Cores (KSH)

MAIN FEATURES


- Good DC-bias Characteristics
- High Saturation Flux Density (12,000 Gauss)
- Low Core Losses

MAIN APPLICATIONS


- Industrial Power
- PV Inverter
- Uninterruptible Power Supply



Percent Change of Permeability vs. DC Magnetizing Force

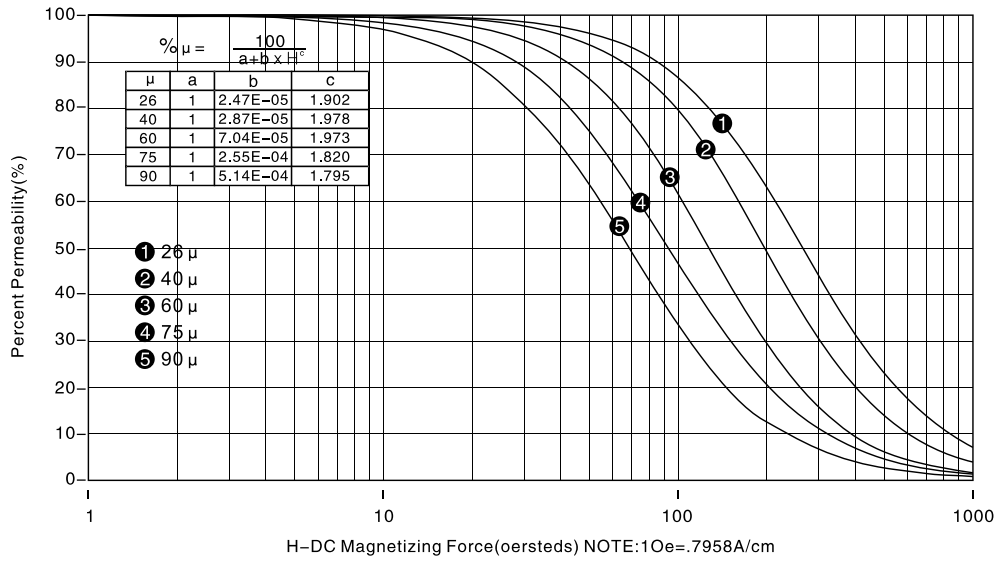


Typical Core Loss Curves(26 μ , 40 μ)

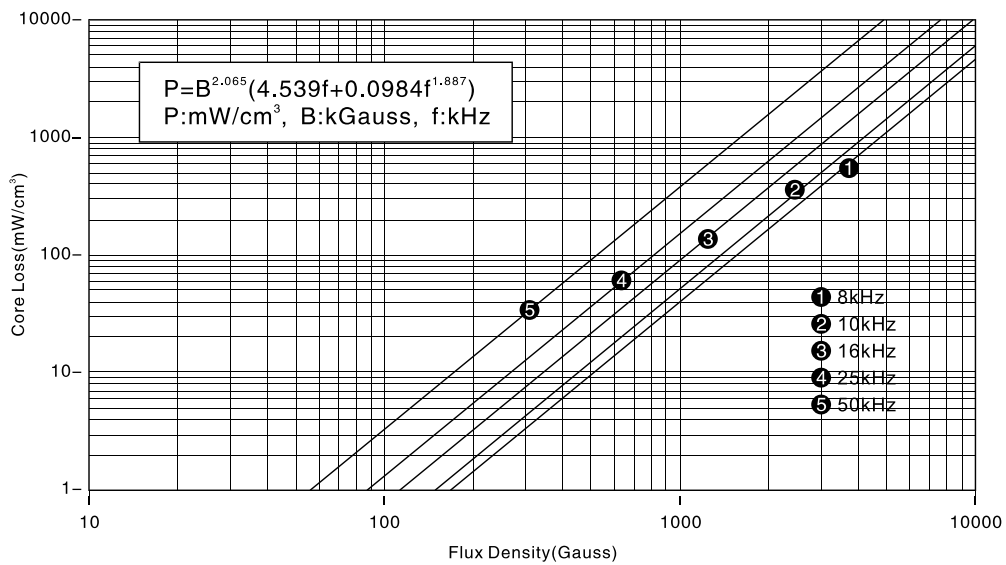


Super Sendust Cores (KSH)

Typical Core Loss Curves(60 μ ,75 μ ,90 μ)

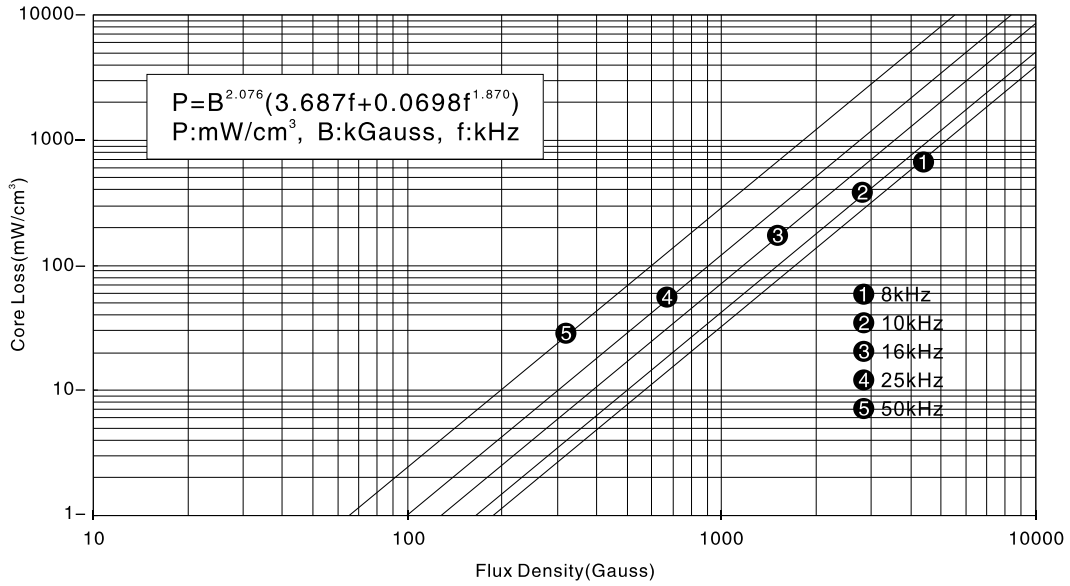


Permeability vs. Frequency

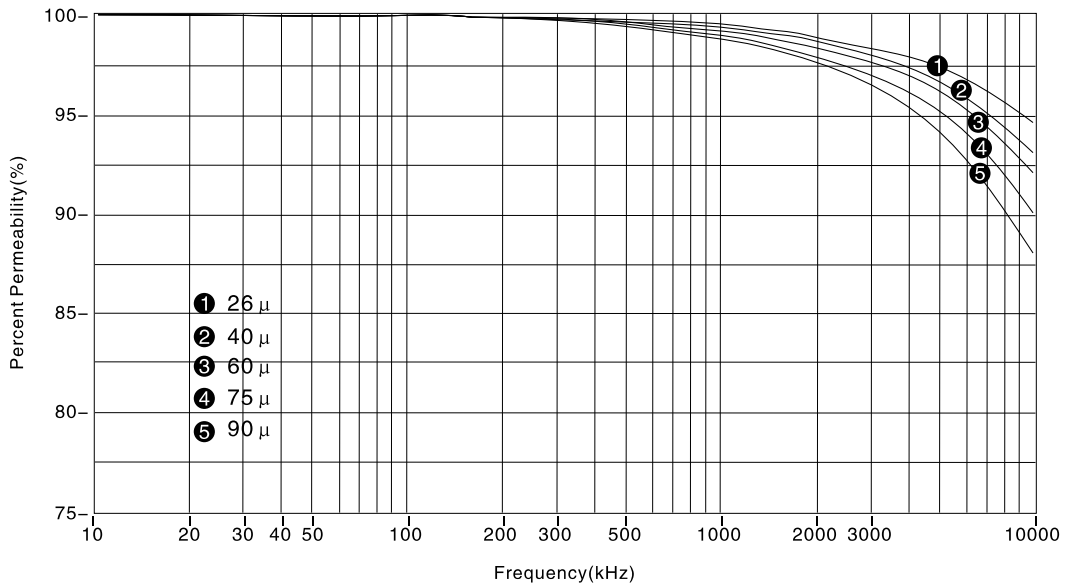


Super Sendust Cores (KSH)

Normal Magnetization Curves

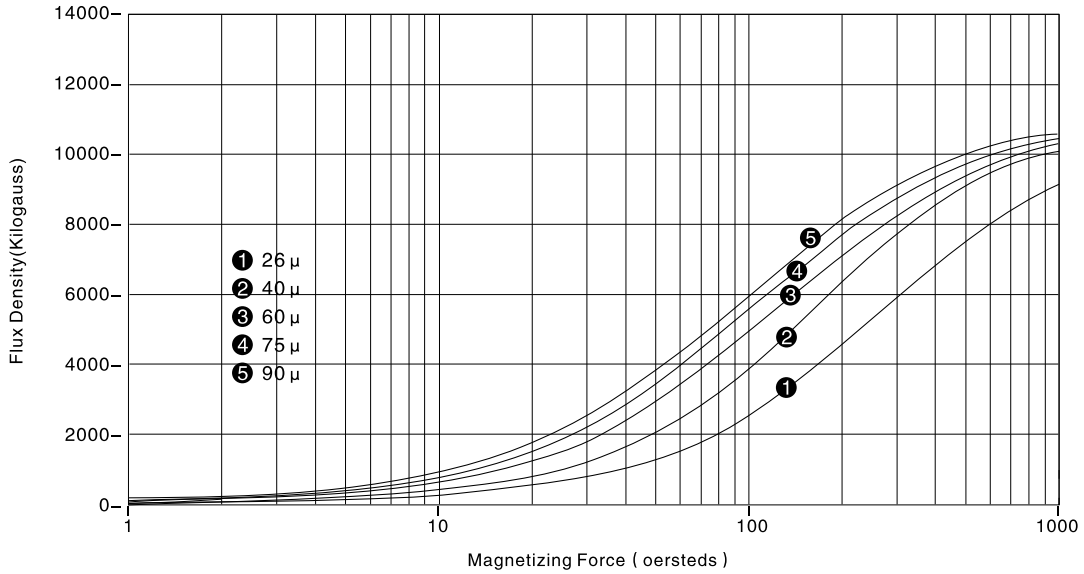

Temperature Stability

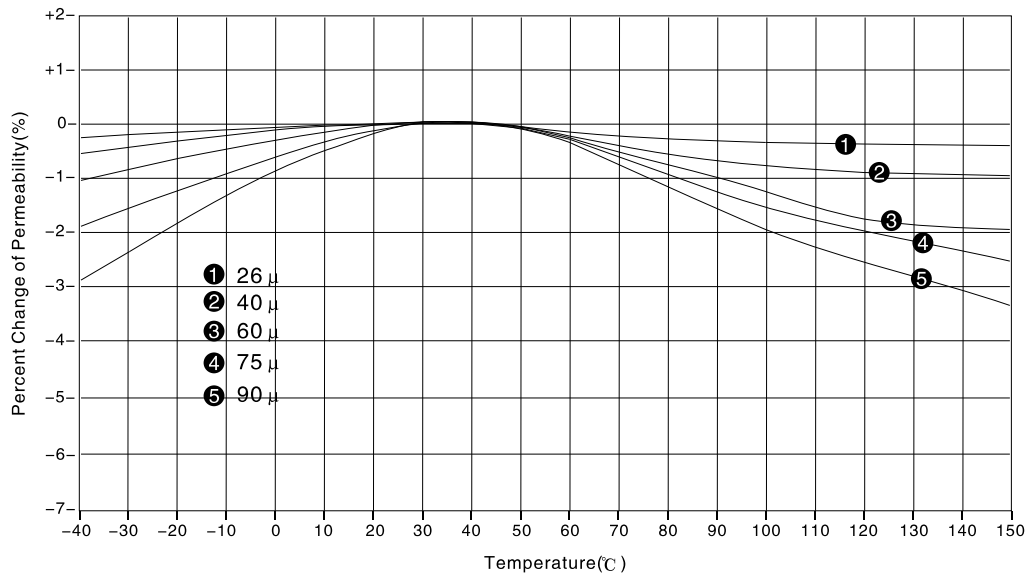

Super Sendust Cores (KSH)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | ℓ_e in/cm | A_e in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|-------------------|---|---------------------------------------|---------------------------------------|----------------------------|-------------------|
| | | | | | | | OD (max)×ID (min)×HT (max) | Before Coating |
| KSH050-026A | 26 | 12 | 1.229 /3.120 | 0.0177 /0.114 | 0.022 /0.356 | 0.0594 /0.383 | 12.70×7.62×4.75 | 13.46×6.99×5.51 |
| KSH050-060A | 60 | 27 | | | | | | |
| KSH050-075A | 75 | 34 | | | | | | |
| KSH050-090A | 90 | 40 | | | | | | |
| KSH065-026A | 26 | 15 | 1.619 /4.110 | 0.0298 /0.192 | 0.048 /0.789 | 0.1105 /0.713 | 16.50×10.20×6.35 | 17.40×9.53×7.11 |
| KSH065-060A | 60 | 35 | | | | | | |
| KSH065-075A | 75 | 43 | | | | | | |
| KSH065-090A | 90 | 52 | | | | | | |
| KSH068-026A | 26 | 19 | 1.630 /4.140 | 0.0360 /0.232 | 0.059 /0.960 | 0.0990 /0.638 | 17.30×9.65×6.35 | 18.03×9.02×7.11 |
| KSH068-060A | 60 | 43 | | | | | | |
| KSH068-075A | 75 | 53 | | | | | | |
| KSH068-090A | 90 | 64 | | | | | | |
| KSH080-026A | 26 | 14 | 2.010 /5.090 | 0.0350 /0.226 | 0.070 /1.150 | 0.1772 /1.140 | 20.30×12.70×6.35 | 21.10×12.07×7.11 |
| KSH080-060A | 60 | 32 | | | | | | |
| KSH080-075A | 75 | 41 | | | | | | |
| KSH080-090A | 90 | 49 | | | | | | |
| KSH090-026A | 26 | 19 | 2.230 /5.670 | 0.0513 /0.331 | 0.114 /1.880 | 0.2181 /1.410 | 22.90×14.07×7.62 | 23.62×13.39×8.38 |
| KSH090-060A | 60 | 43 | | | | | | |
| KSH090-075A | 75 | 54 | | | | | | |
| KSH090-090A | 90 | 65 | | | | | | |
| KSH092-026A | 26 | 22 | 2.320 /5.880 | 0.0610 /0.388 | 0.142 /2.280 | 0.2307 /1.490 | 23.60×14.40×8.89 | 24.30×13.77×9.70 |
| KSH092-060A | 60 | 51 | | | | | | |
| KSH092-075A | 75 | 63 | | | | | | |
| KSH092-090A | 90 | 76 | | | | | | |
| KSH106-026A | 26 | 32 | 2.500 /6.350 | 0.1014 /0.654 | 0.254 /4.150 | 0.2419 /1.560 | 26.90×14.70×11.20 | 27.70×14.10×11.99 |
| KSH106-060A | 60 | 75 | | | | | | |
| KSH106-075A | 75 | 94 | | | | | | |
| KSH106-090A | 90 | 113 | | | | | | |
| KSH107-026A | 26 | 22 | 2.501 /6.352 | 0.0770 /0.497 | 0.198 /3.155 | 0.2419 /1.561 | 26.90×14.70×8.64 | 27.70×14.10×9.45 |
| KSH107-060A | 60 | 59 | | | | | | |
| KSH107-075A | 75 | 74 | | | | | | |
| KSH107-090A | 90 | 89 | | | | | | |

Super Sendust Cores (KSH)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|--------------------------------|-------------------|
| | | | | | | | OD (max) × ID (min) × HT (max) | Before Coating |
| KSH130-026A | 26 | 28 | 3.210 /8.150 | 0.1042 /0.672 | 0.334 /5.480 | 0.4537 /2.930 | 33.00×19.90×10.70 | 33.83×19.30×11.61 |
| KSH130-060A | 60 | 61 | | | | | | |
| KSH130-075A | 75 | 76 | | | | | | |
| KSH130-090A | 90 | 91 | | | | | | |
| KSH131-026A | 26 | 22 | 3.207 /8.147 | 0.0854 /0.551 | 0.274 /4.490 | 0.4537 /2.927 | 33.00×19.90×8.76 | 33.83×19.30×9.70 |
| KSH131-060A | 60 | 51 | | | | | | |
| KSH131-075A | 75 | 64 | | | | | | |
| KSH131-090A | 90 | 76.5 | | | | | | |
| KSH132-026A | 26 | 28 | 3.207 /8.147 | 0.1082 /0.698 | 0.347 /5.687 | 0.4537 /2.927 | 33.00×19.90×11.18 | 33.83×19.30×11.99 |
| KSH132-060A | 60 | 65 | | | | | | |
| KSH132-075A | 75 | 81 | | | | | | |
| KSH132-090A | 90 | 97 | | | | | | |
| KSH135-026A | 26 | 16 | 3.530 /8.950 | 0.0704 /0.454 | 0.249 /4.060 | 0.6193 /4.010 | 34.30×23.40×8.89 | 35.10×22.56×9.83 |
| KSH135-060A | 60 | 38 | | | | | | |
| KSH135-075A | 75 | 47 | | | | | | |
| KSH135-090A | 90 | 57 | | | | | | |
| KSH141-026A | 26 | 24 | 3.540 /8.980 | 0.1051 /0.678 | 0.372 /6.088 | 0.5648 /3.640 | 35.80×22.40×10.50 | 36.63×21.54×11.28 |
| KSH141-060A | 60 | 56 | | | | | | |
| KSH141-075A | 75 | 70 | | | | | | |
| KSH141-090A | 90 | 84 | | | | | | |
| KSH157-026A | 26 | 35 | 3.880 /9.840 | 0.1662 /1.072 | 0.645 /10.500 | 0.6619 /4.270 | 39.90×24.10×14.50 | 40.72×23.30×15.37 |
| KSH157-060A | 60 | 81 | | | | | | |
| KSH157-075A | 75 | 101 | | | | | | |
| KSH157-090A | 90 | 121 | | | | | | |
| KSH158-026A | 26 | 53 | 0.374 /9.510 | 0.060 /1.537 | 0.592 /15.043 | 0.5500 /3.550 | 40.13×22.08×17.00 | 40.94×21.27×17.89 |
| KSH158-060A | 60 | 122 | | | | | | |
| KSH158-075A | 75 | 152 | | | | | | |
| KSH158-090A | 90 | 183 | | | | | | |
| KSH168-026A | 26 | 47 | 4.040 /10.216 | 0.229 /1.475 | 0.960 /15.741 | 0.5648 /3.644 | 42.90×24.20×16.26 | 44.00×23.30×17.16 |
| KSH168-060A | 60 | 108 | | | | | | |
| KSH168-075A | 75 | 135 | | | | | | |
| KSH168-090A | 90 | 161 | | | | | | |

Super Sendust Cores (KSH)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_e in/cm | A_e in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|--------------------------------|-------------------|
| | | | | | | | OD (max) × ID (min) × HT (max) | Before Coating |
| KSH184-026A | 26 | 59 | 4.230 /10.740 | 0.308 /1.990 | 1.300 /21.300 | 0.6619 /4.270 | 46.70×24.10×18.00 | 47.63×23.32×18.92 |
| KSH184-060A | 60 | 135 | | | | | | |
| KSH184-075A | 75 | 169 | | | | | | |
| KSH184-090A | 90 | 202 | | | | | | |
| KSH185-026A | 26 | 37 | 4.580 /11.630 | 0.208 /1.340 | 0.953 /15.530 | 0.6469 /6.110 | 46.70×28.70×15.20 | 47.63×27.89×16.13 |
| KSH185-060A | 60 | 86 | | | | | | |
| KSH185-075A | 75 | 107 | | | | | | |
| KSH185-090A | 90 | 128 | | | | | | |
| KSH200-026A | 26 | 32 | 5.020 /12.730 | 0.194 /1.251 | 0.974 /15.930 | 1.165 /7.500 | 50.80×31.80×13.50 | 51.69×30.94×14.35 |
| KSH200-060A | 60 | 73 | | | | | | |
| KSH200-075A | 75 | 91 | | | | | | |
| KSH200-090A | 90 | 109 | | | | | | |
| KSH225-026A | 26 | 33 | 5.630 /14.300 | 0.224 /1.444 | 12.260 /20.650 | 1.470 /9.480 | 57.20×35.60×14.00 | 58.00×34.70×14.86 |
| KSH225-060A | 60 | 75 | | | | | | |
| KSH225-075A | 75 | 94 | | | | | | |
| KSH225-090A | 90 | 112 | | | | | | |
| KSH226-026A | 26 | 60 | 4.930 /12.500 | 0.355 /2.290 | 1.750 /28.600 | 0.796 /5.140 | 57.20×26.40×15.20 | 58.00×25.60×16.10 |
| KSH226-060A | 60 | 138 | | | | | | |
| KSH226-075A | 75 | 175 | | | | | | |
| KSH226-090A | 90 | 207 | | | | | | |
| KSH250-026A | 26 | 83 | 5.660 /14.370 | 0.570 /3.675 | 3.223 /52.810 | 1.198 /7.730 | 62.00×32.60×25.00 | 63.10×31.37×26.27 |
| KSH250-060A | 60 | 192 | | | | | | |
| KSH250-075A | 75 | 240 | | | | | | |
| KSH250-090A | 90 | 288 | | | | | | |
| KSH268-026A | 26 | 62 | 6.429 /16.330 | 0.481 /3.104 | 3.093 /50.690 | 1.491 /9.620 | 68.00×36.00×20.00 | 69.40×34.70×21.40 |
| KSH268-060A | 60 | 143 | | | | | | |
| KSH268-075A | 75 | 179 | | | | | | |
| KSH268-090A | 90 | 215 | | | | | | |
| KSH290-026A | 26 | 89 | 7.24 /18.380 | 0.781 /5.040 | 5.653 /92.640 | 2.364 /15.250 | 74.80×45.30×35.00 | 75.20×44.07×36.27 |
| KSH290-060A | 60 | 206 | | | | | | |
| KSH290-075A | 75 | 257 | | | | | | |
| KSH290-090A | 90 | 309 | | | | | | |

Super Sendust Cores (KSH)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_e in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|--------------------------------|---------------------|
| | | | | | | | OD (max) × ID (min) × HT (max) | |
| | | | | | | | Before Coating | After Coating |
| KSH300-026A | 26 | 30 | 7.72 /20.000 | 0.274 /1.770 | 2.115 /34.700 | 2.800 /17.990 | 77.80×49.20×12.70 | 78.90×48.20×13.84 |
| KSH300-060A | 60 | 68 | | | | | | |
| KSH300-075A | 75 | 85 | | | | | | |
| KSH300-090A | 90 | 102 | | | | | | |
| KSH301-026A | 26 | 37 | 7.86 /19.950 | 0.352 /2.270 | 2.770 /45.300 | 2.800 /17.990 | 77.80×49.20×15.90 | 78.90×48.20×17.02 |
| KSH301-060A | 60 | 85 | | | | | | |
| KSH301-075A | 75 | 107 | | | | | | |
| KSH301-090A | 90 | 128 | | | | | | |
| KSH400-026A | 26 | 48 | 9.56 /24.271 | 0.546 /3.523 | 5.217 /85.495 | 3.784 /24.413 | 101.60×57.15×16.51 | 103.12×55.75×17.78 |
| KSH400-060A | 60 | 112 | | | | | | |
| KSH400-075A | 75 | 137 | | | | | | |
| KSH400-090A | 90 | 164 | | | | | | |
| KSH401-026A | 26 | 40 | 9.56 /24.271 | 0.461 /2.972 | 4.401 /72.122 | 3.784 /24.413 | 101.60×57.15×13.59 | 103.12×55.75×14.86 |
| KSH401-060A | 60 | 92 | | | | | | |
| KSH401-075A | 75 | 115 | | | | | | |
| KSH401-090A | 90 | 139 | | | | | | |
| KSH520-026A | 26 | 54 | 12.77 /32.428 | 0.829 /5.347 | 10.580 /173.400 | 7.225 /46.612 | 132.54×78.59×20.32 | 133.96×77.04×21.72 |
| KSH520-060A | 60 | 124 | | | | | | |
| KSH520-075A | 75 | 155 | | | | | | |
| KSH520-090A | 90 | 187 | | | | | | |
| KSH521-026A | 26 | 67.6 | 12.77 /32.429 | 1.040 /6.710 | 13.280 /217.580 | 7.225 /46.612 | 132.54×78.59×25.40 | 133.96×77.04×26.80 |
| KSH521-060A | 60 | 156 | | | | | | |
| KSH521-075A | 75 | 195 | | | | | | |
| KSH521-090A | 90 | 234 | | | | | | |
| KSH650-026A | 26 | 160 | 15.22 /38.650 | 2.932 /18.920 | 44.620 /731.260 | 9.190 /59.310 | 165.00×88.90×50.80 | 167.20×86.90×52.90 |
| KSH650-060A | 60 | 368 | | | | | | |
| KSH651-026A | 26 | 78 | 16.22 /41.200 | 1.529 /9.870 | 63.085 /407.000 | 12.440 /80.300 | 165.00×102.40×31.75 | 166.50×101.00×33.15 |
| KSH651-060A | 60 | 180 | | | | | | |

Si-Fe Cores (KSF)

MAIN FEATURES


High Saturation Flux Density (16,000 Gauss)
 Excellent DC-bias Characteristics
 Excellent Thermal Stability Without Aging Problem

MAIN APPLICATIONS


Industrial Power Supply
 PV Inverter
 Uninterruptible Power Supply



Percent Change of Permeability vs. DC Magnetizing Force

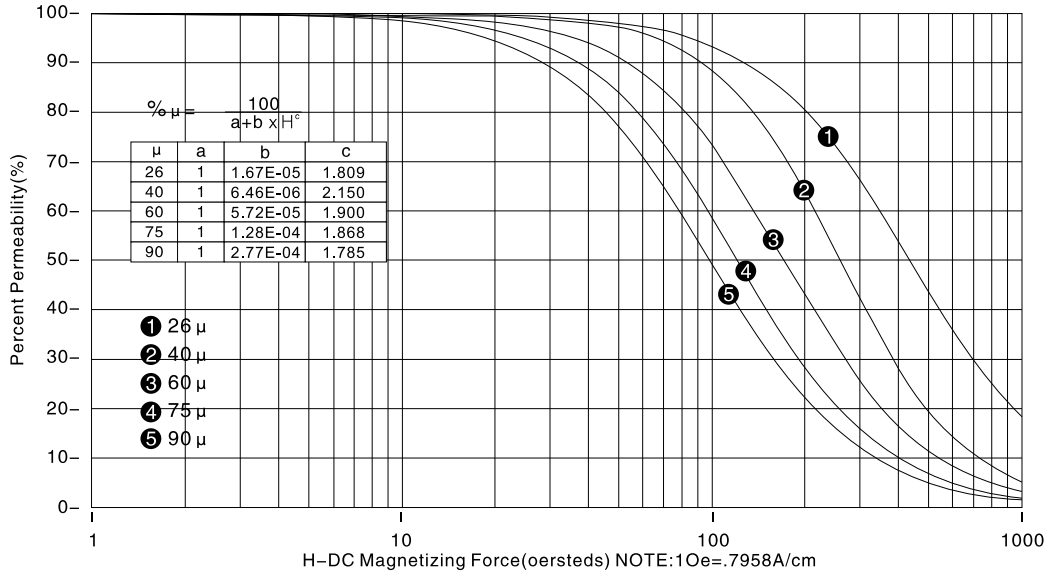


Typical Core Loss Curves(26 μ ,40 μ)

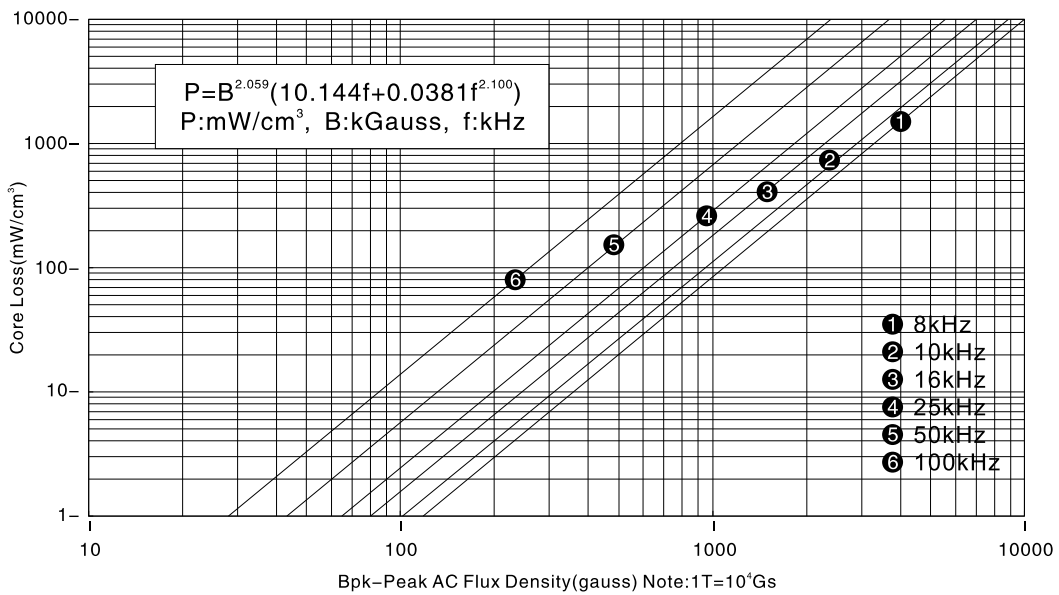


Si-Fe Cores (KSF)

Typical Core Loss Curves(60 μ ,75 μ ,90 μ)

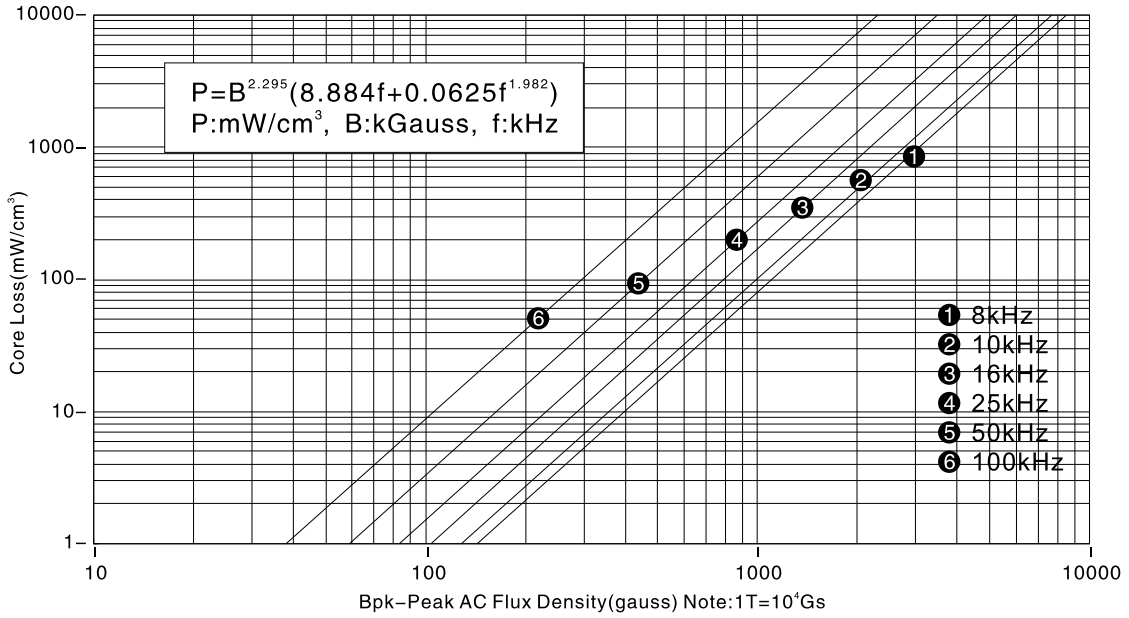


Permeability vs. Frequency

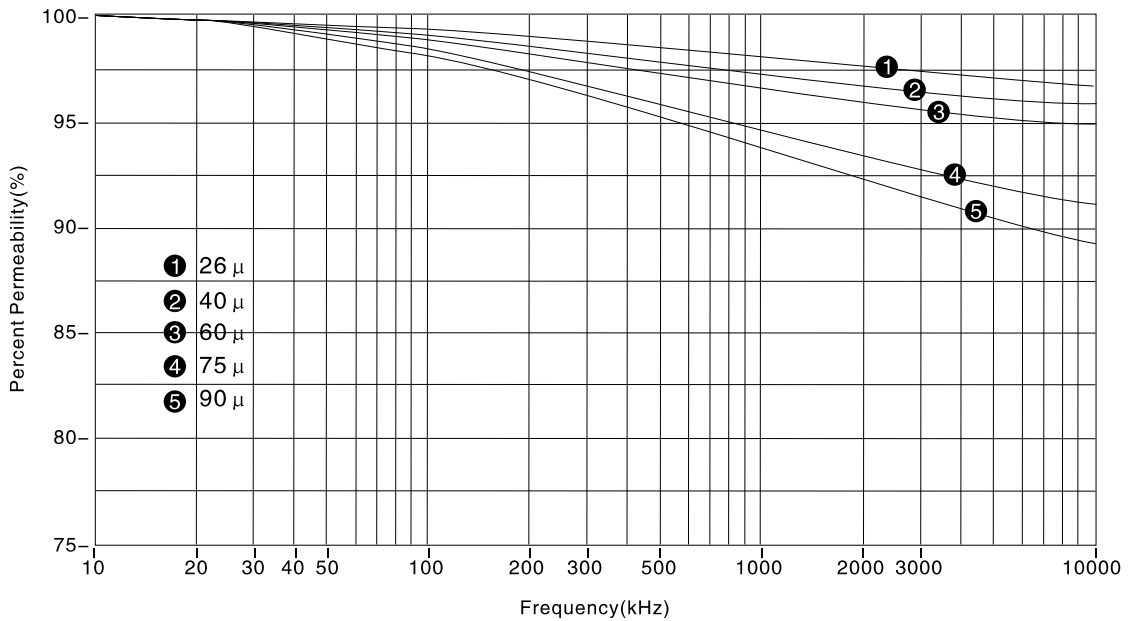


Si-Fe Cores (KSF)

Normal Magnetization Curves

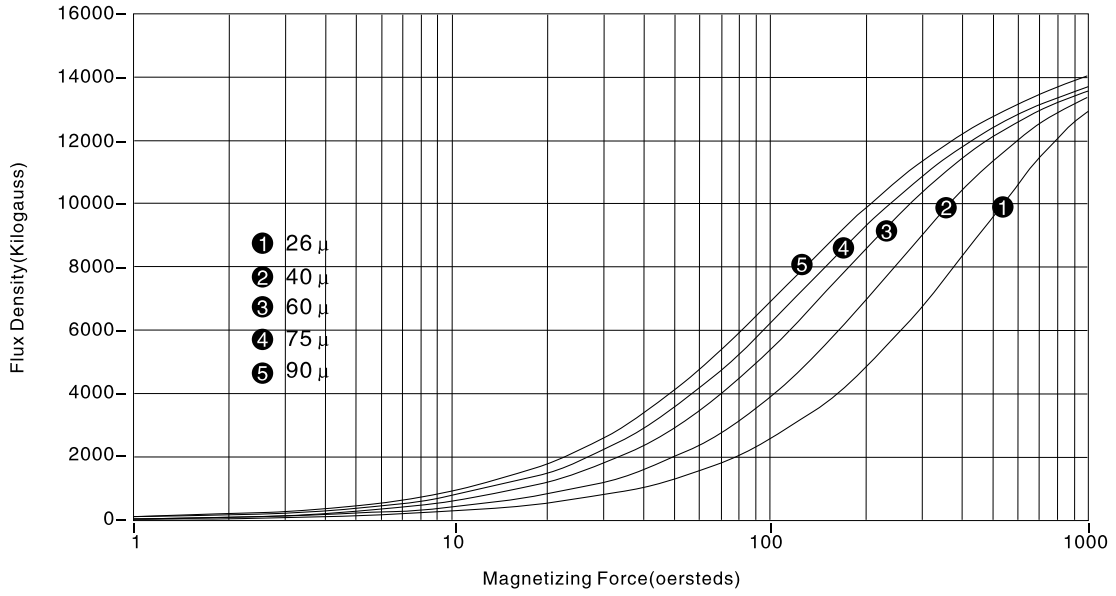

Temperature Stability

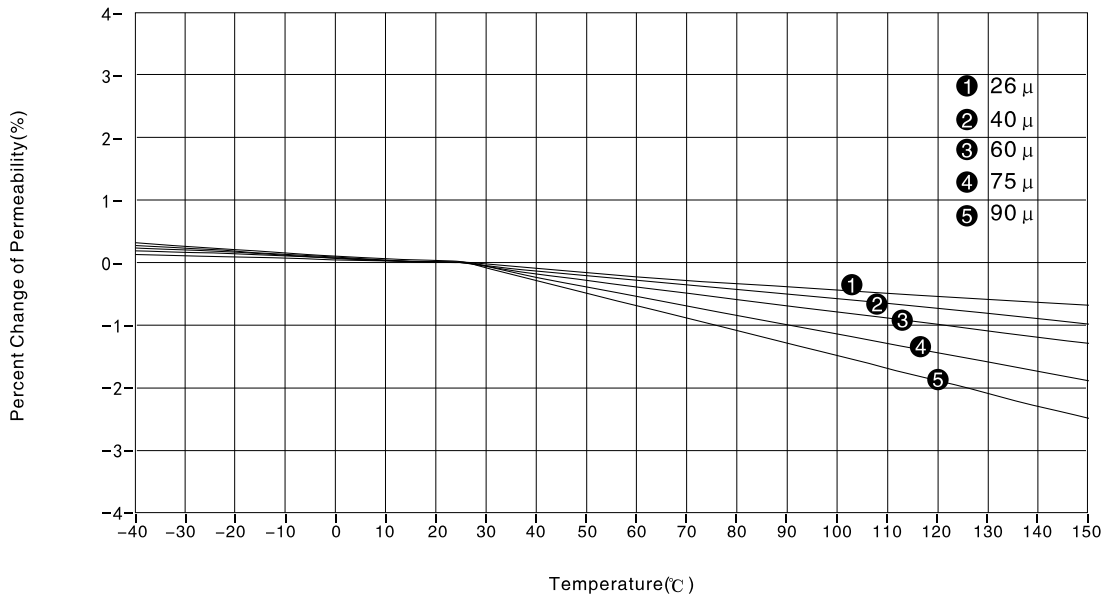

Si-Fe Cores (KSF)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | ℓ_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|-------------------|---|---------------------------------------|---------------------------------------|---|-------------------|
| | | | | | | | OD(max)×ID(min)×HT(max) Before Coating | After Coating |
| KSF050-026A | 26 | 12 | 1.229 /3.120 | 0.0177 /0.114 | 0.022 /0.356 | 0.0594 /0.383 | 12.70×7.62×4.75 | 13.46×6.99×5.51 |
| KSF050-060A | 60 | 27 | | | | | | |
| KSF050-075A | 75 | 34 | | | | | | |
| KSF050-090A | 90 | 40 | | | | | | |
| KSF065-026A | 26 | 15 | 1.619 /4.110 | 0.0298 /0.192 | 0.048 /0.789 | 0.1105 /0.713 | 16.50×10.20×6.35 | 17.40×9.53×7.11 |
| KSF065-060A | 60 | 35 | | | | | | |
| KSF065-075A | 75 | 43 | | | | | | |
| KSF065-090A | 90 | 52 | | | | | | |
| KSF068-026A | 26 | 19 | 1.630 /4.140 | 0.0360 /0.232 | 0.059 /0.960 | 0.0990 /0.638 | 17.30×9.65×6.35 | 18.03×9.02×7.11 |
| KSF068-060A | 60 | 43 | | | | | | |
| KSF068-075A | 75 | 53 | | | | | | |
| KSF068-090A | 90 | 64 | | | | | | |
| KSF080-026A | 26 | 14 | 2.010 /5.090 | 0.0350 /0.226 | 0.070 /1.150 | 0.1772 /1.140 | 20.30×12.70×6.35 | 21.10×12.07×7.11 |
| KSF080-060A | 60 | 32 | | | | | | |
| KSF080-075A | 75 | 41 | | | | | | |
| KSF080-090A | 90 | 49 | | | | | | |
| KSF090-026A | 26 | 19 | 2.230 /5.670 | 0.0513 /0.331 | 0.114 /1.880 | 0.2181 /1.410 | 22.90×14.07×7.62 | 23.62×13.39×8.38 |
| KSF090-060A | 60 | 43 | | | | | | |
| KSF090-075A | 75 | 54 | | | | | | |
| KSF090-090A | 90 | 65 | | | | | | |
| KSF092-026A | 26 | 22 | 2.320 /5.880 | 0.0610 /0.388 | 0.142 /2.280 | 0.2307 /1.490 | 23.60×14.40×8.89 | 24.30×13.77×9.70 |
| KSF092-060A | 60 | 51 | | | | | | |
| KSF092-075A | 75 | 63 | | | | | | |
| KSF092-090A | 90 | 76 | | | | | | |
| KSF106-026A | 26 | 32 | 2.500 /6.350 | 0.1014 /0.654 | 0.254 /4.150 | 0.2419 /1.560 | 26.90×14.70×11.20 | 27.70×14.10×11.99 |
| KSF106-060A | 60 | 75 | | | | | | |
| KSF106-075A | 75 | 94 | | | | | | |
| KSF106-090A | 90 | 113 | | | | | | |
| KSF107-026A | 26 | 22 | 2.501 /6.352 | 0.0770 /0.497 | 0.198 /3.155 | 0.2419 /1.561 | 26.90×14.70×8.64 | 27.70×14.10×9.45 |
| KSF107-060A | 60 | 59 | | | | | | |
| KSF107-075A | 75 | 74 | | | | | | |
| KSF107-090A | 90 | 89 | | | | | | |
| KSF130-026A | 26 | 28 | 3.210 /8.150 | 0.1042 /0.672 | 0.334 /5.480 | 0.4537 /2.930 | 33.00×19.90×10.70 | 33.83×19.30×11.61 |
| KSF130-060A | 60 | 61 | | | | | | |
| KSF130-075A | 75 | 76 | | | | | | |
| KSF130-090A | 90 | 91 | | | | | | |

Si-Fe Cores (KSF)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|-------------------------|-------------------|
| | | | | | | | OD(max)×ID(min)×HT(max) | |
| | | | | | | | Before Coating | After Coating |
| KSF131-026A | 26 | 22 | 3.207 /8.147 | 0.0854 /0.551 | 0.274 /4.490 | 0.4537 /2.927 | 33.00×19.90×8.76 | 33.83×19.30×9.70 |
| KSF131-060A | 60 | 51 | | | | | | |
| KSF131-075A | 75 | 64 | | | | | | |
| KSF131-090A | 90 | 76.5 | | | | | | |
| KSF132-026A | 26 | 28 | 3.207 /8.147 | 0.1082 /0.698 | 0.347 /5.687 | 0.4537 /2.927 | 33.00×19.90×11.18 | 33.83×19.30×11.99 |
| KSF132-060A | 60 | 65 | | | | | | |
| KSF132-075A | 75 | 81 | | | | | | |
| KSF132-090A | 90 | 97 | | | | | | |
| KSF135-026A | 26 | 16 | 3.530 /8.950 | 0.0704 /0.454 | 0.249 /4.060 | 0.6193 /4.010 | 34.30×23.40×8.89 | 35.10×22.56×9.83 |
| KSF135-060A | 60 | 38 | | | | | | |
| KSF135-075A | 75 | 47 | | | | | | |
| KSF135-090A | 90 | 57 | | | | | | |
| KSF141-026A | 26 | 24 | 3.540 /8.980 | 0.1051 /0.678 | 0.372 /6.088 | 0.5648 /3.640 | 35.80×22.40×10.50 | 36.63×21.54×11.28 |
| KSF141-060A | 60 | 56 | | | | | | |
| KSF141-075A | 75 | 70 | | | | | | |
| KSF141-090A | 90 | 84 | | | | | | |
| KSF157-026A | 26 | 35 | 3.880 /9.840 | 0.1662 /1.072 | 0.645 /10.500 | 0.6619 /4.270 | 39.90×24.10×14.50 | 40.72×23.30×15.37 |
| KSF157-060A | 60 | 81 | | | | | | |
| KSF157-075A | 75 | 101 | | | | | | |
| KSF157-090A | 90 | 121 | | | | | | |
| KSF158-026A | 26 | 53 | 0.374 /9.510 | 0.060 /1.537 | 0.592 /15.043 | 0.5500 /3.550 | 40.13×22.08×17.00 | 40.94×21.27×17.89 |
| KSF158-060A | 60 | 122 | | | | | | |
| KSF158-075A | 75 | 152 | | | | | | |
| KSF158-090A | 90 | 183 | | | | | | |
| KSF168-026A | 26 | 47 | 4.040 /10.216 | 0.229 /1.475 | 0.960 /15.741 | 0.5648 /3.644 | 42.90×24.20×16.26 | 44.00×23.30×17.16 |
| KSF168-060A | 60 | 108 | | | | | | |
| KSF168-075A | 75 | 135 | | | | | | |
| KSF168-090A | 90 | 161 | | | | | | |
| KSF184-026A | 26 | 59 | 4.230 /10.740 | 0.308 /1.990 | 1.300 /21.300 | 0.6619 /4.270 | 46.70×24.10×18.00 | 47.63×23.32×18.92 |
| KSF184-060A | 60 | 135 | | | | | | |
| KSF184-075A | 75 | 169 | | | | | | |
| KSF184-090A | 90 | 202 | | | | | | |
| KSF185-026A | 26 | 37 | 4.580 /11.630 | 0.208 /1.340 | 0.953 /15.530 | 0.6469 /6.110 | 46.70×28.70×15.20 | 47.63×27.89×16.13 |
| KSF185-060A | 60 | 86 | | | | | | |
| KSF185-075A | 75 | 107 | | | | | | |
| KSF185-090A | 90 | 128 | | | | | | |

Si-Fe Cores (KSF)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_e in/cm | A_e in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|---|--------------------------------------|
| | | | | | | | OD(max) \times ID(min) \times HT(max) | Before Coating |
| KSF200-026A | 26 | 32 | 5.020 /12.730 | 0.194 /1.251 | 0.974 /15.930 | 1.165 /7.500 | 50.80 \times 31.80 \times 13.50 | 51.69 \times 30.94 \times 14.35 |
| KSF200-060A | 60 | 73 | | | | | | |
| KSF200-075A | 75 | 91 | | | | | | |
| KSF200-090A | 90 | 109 | | | | | | |
| KSF225-026A | 26 | 33 | 5.630 /14.300 | 0.224 /1.444 | 12.260 /20.650 | 1.470 /9.480 | 57.20 \times 35.60 \times 14.00 | 58.00 \times 34.70 \times 14.86 |
| KSF225-060A | 60 | 75 | | | | | | |
| KSF225-075A | 75 | 94 | | | | | | |
| KSF225-090A | 90 | 112 | | | | | | |
| KSF226-026A | 26 | 60 | 4.930 /12.500 | 0.355 /2.290 | 1.750 /28.600 | 0.796 /5.140 | 57.20 \times 26.40 \times 15.20 | 58.00 \times 25.60 \times 16.10 |
| KSF226-060A | 60 | 138 | | | | | | |
| KSF226-075A | 75 | 175 | | | | | | |
| KSF226-090A | 90 | 207 | | | | | | |
| KSF250-026A | 26 | 83 | 5.660 /14.370 | 0.570 /3.675 | 3.223 /52.810 | 1.198 /7.730 | 62.00 \times 32.60 \times 25.00 | 63.10 \times 31.37 \times 26.27 |
| KSF250-060A | 60 | 192 | | | | | | |
| KSF250-075A | 75 | 240 | | | | | | |
| KSF250-090A | 90 | 288 | | | | | | |
| KSF268-026A | 26 | 62 | 6.429 /16.330 | 0.481 /3.104 | 3.093 /50.690 | 1.491 /9.620 | 68.00 \times 36.00 \times 20.00 | 69.40 \times 34.70 \times 21.40 |
| KSF268-060A | 60 | 143 | | | | | | |
| KSF268-075A | 75 | 179 | | | | | | |
| KSF268-090A | 90 | 215 | | | | | | |
| KSF290-026A | 26 | 89 | 7.24 /18.380 | 0.781 /5.040 | 5.653 /92.640 | 2.364 /15.250 | 74.80 \times 45.30 \times 35.00 | 75.20 \times 44.07 \times 36.27 |
| KSF290-060A | 60 | 206 | | | | | | |
| KSF290-075A | 75 | 257 | | | | | | |
| KSF290-090A | 90 | 309 | | | | | | |
| KSF300-026A | 26 | 30 | 7.72 /20.000 | 0.274 /1.770 | 2.115 /34.700 | 2.800 /17.990 | 77.80 \times 49.20 \times 12.70 | 78.90 \times 48.20 \times 13.84 |
| KSF300-060A | 60 | 68 | | | | | | |
| KSF300-075A | 75 | 85 | | | | | | |
| KSF300-090A | 90 | 102 | | | | | | |
| KSF301-026A | 26 | 37 | 7.86 /19.950 | 0.352 /2.270 | 2.770 /45.300 | 2.800 /17.990 | 77.80 \times 49.20 \times 15.90 | 78.90 \times 48.20 \times 17.02 |
| KSF301-060A | 60 | 85 | | | | | | |
| KSF301-075A | 75 | 107 | | | | | | |
| KSF301-090A | 90 | 128 | | | | | | |
| KSF400-026A | 26 | 48 | 9.56 /24.271 | 0.546 /3.523 | 5.217 /85.495 | 3.784 /24.413 | 101.60 \times 57.15 \times 16.51 | 103.12 \times 55.75 \times 17.78 |
| KSF400-060A | 60 | 112 | | | | | | |
| KSF400-075A | 75 | 137 | | | | | | |
| KSF400-090A | 90 | 164 | | | | | | |




Si-Fe Cores (KSF)

| Part Number | Perm. (μ) | AL $\pm 8\%$ | l_c in/cm | A_c in ² /cm ² | V in ³ /cm ³ | W in ² /cm ² | Dimensions (mm) | |
|-------------|--------------------|-----------------|------------------|---|---------------------------------------|---------------------------------------|-------------------------|---------------------|
| | | | | | | | OD(max)×ID(min)×HT(max) | |
| | | | | | | | Before Coating | After Coating |
| KSF401-026A | 26 | 40 | 9.56 /24.271 | 0.461 /2.972 | 4.401 /72.122 | 3.784 /24.413 | 101.60×57.15×13.59 | 103.12×55.75×14.86 |
| KSF401-060A | 60 | 92 | | | | | | |
| KSF401-075A | 75 | 115 | | | | | | |
| KSF401-090A | 90 | 139 | | | | | | |
| KSF520-026A | 26 | 54 | 12.77 /32.428 | 0.829 /5.347 | 10.580 /173.400 | 7.225 /46.612 | 132.54×78.59×20.32 | 133.96×77.04×21.72 |
| KSF520-060A | 60 | 124 | | | | | | |
| KSF520-075A | 75 | 155 | | | | | | |
| KSF520-090A | 90 | 187 | | | | | | |
| KSF521-026A | 26 | 67.6 | 12.77 /32.429 | 1.040 /6.710 | 13.280 /217.580 | 7.225 /46.612 | 132.54×78.59×25.40 | 133.96×77.04×26.80 |
| KSF521-060A | 60 | 156 | | | | | | |
| KSF521-075A | 75 | 195 | | | | | | |
| KSF521-090A | 90 | 234 | | | | | | |
| KSF650-026A | 26 | 160 | 15.22 /38.650 | 2.932 /18.920 | 44.620 /731.260 | 9.190 /59.310 | 165.00×88.90×50.80 | 167.20×86.90×52.90 |
| KSF650-060A | 60 | 368 | | | | | | |
| KSF651-026A | 26 | 78 | 16.22 /41.200 | 1.529 /9.870 | 63.085 /407.000 | 12.440 /80.300 | 165.00×102.40×31.75 | 166.50×101.00×33.15 |
| KSF651-060A | 60 | 180 | | | | | | |

ALLOY POWDER CORE SERIES PRODUCTS

Material Characteristics Curves




Temperature Stability

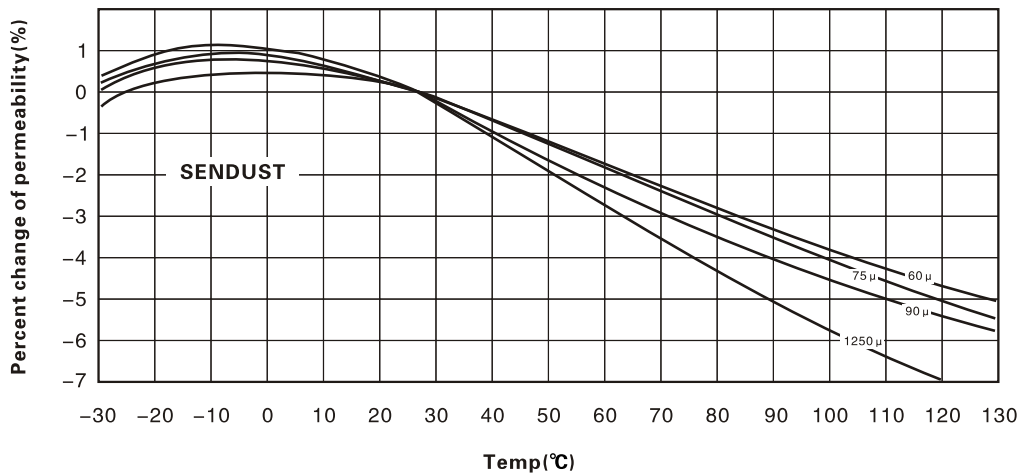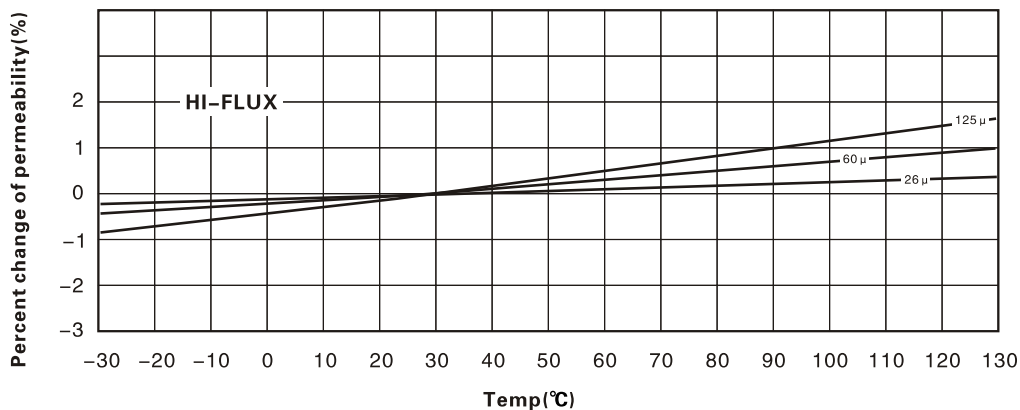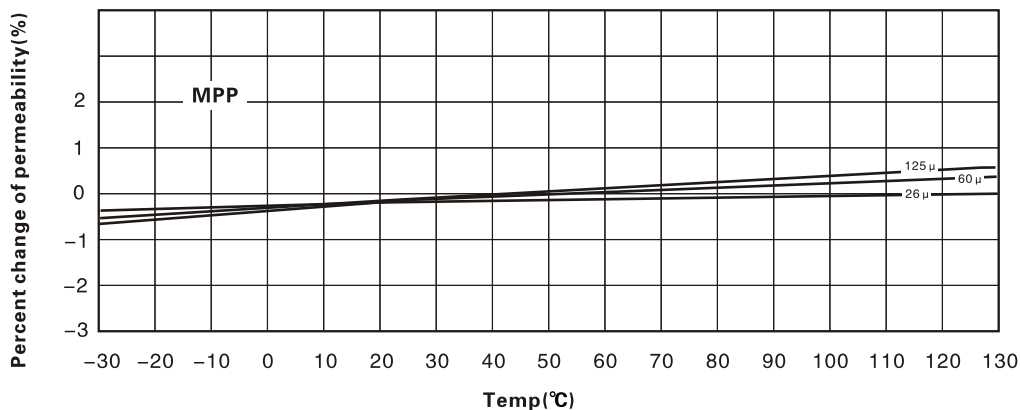

ALLOY POWDER CORE SERIES PRODUCTS

Material Characteristics Curves




Typical Incremental Permeability vs.D.C.Bias

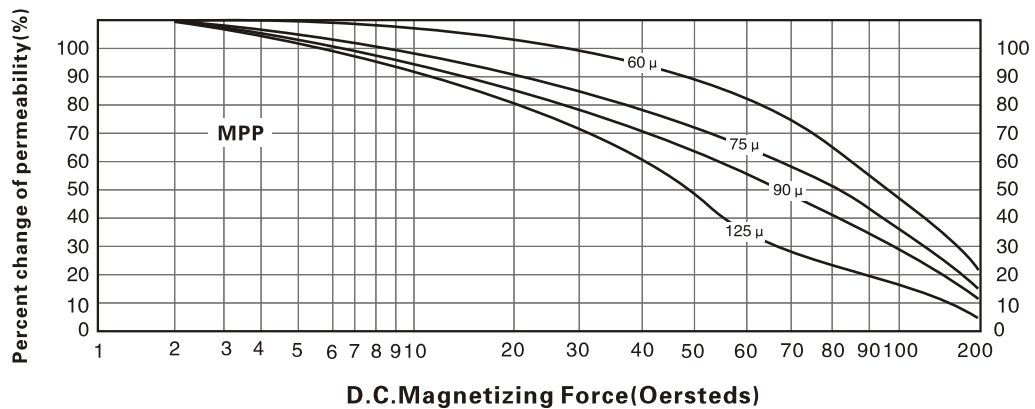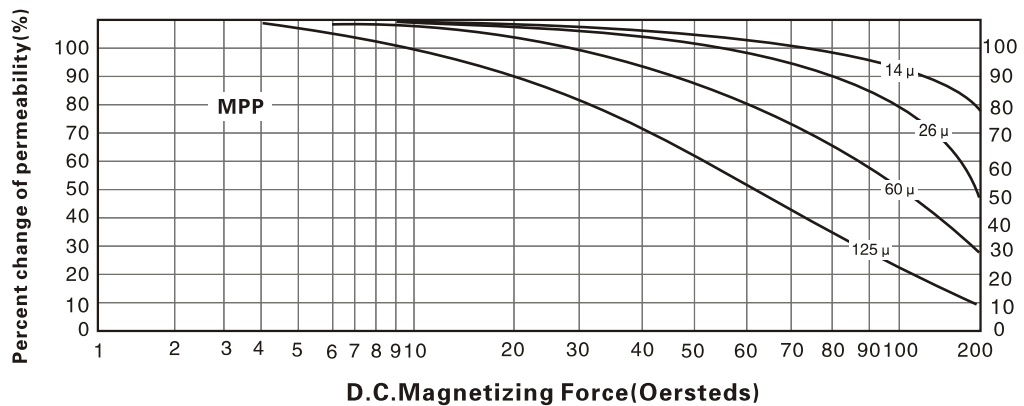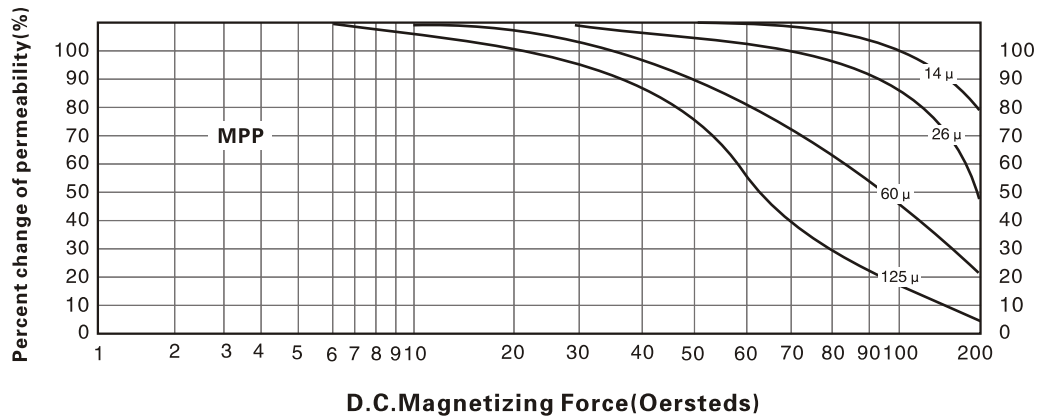

ALLOY POWDER CORE SERIES PRODUCTS

Material Characteristics Curves




Permeability vs AC Flux Density

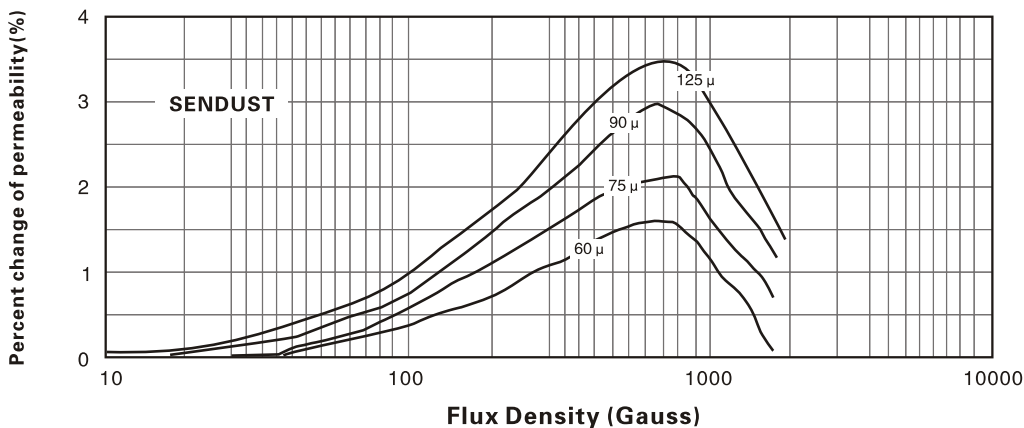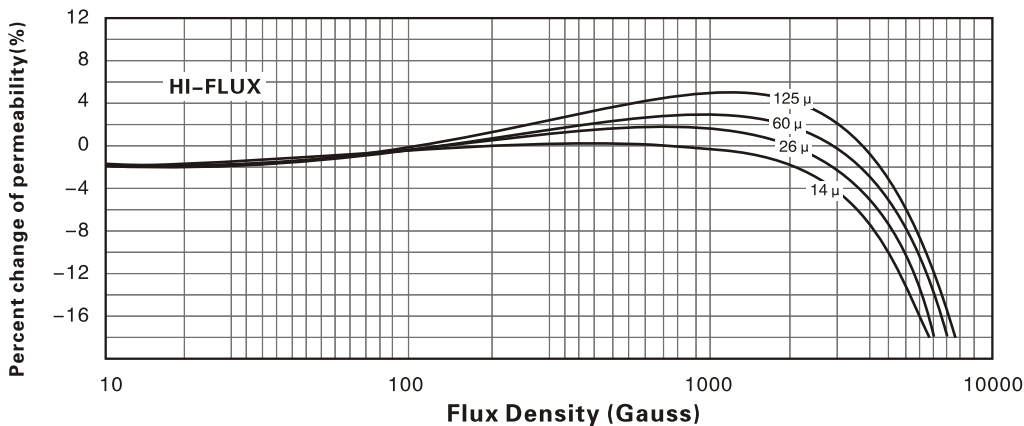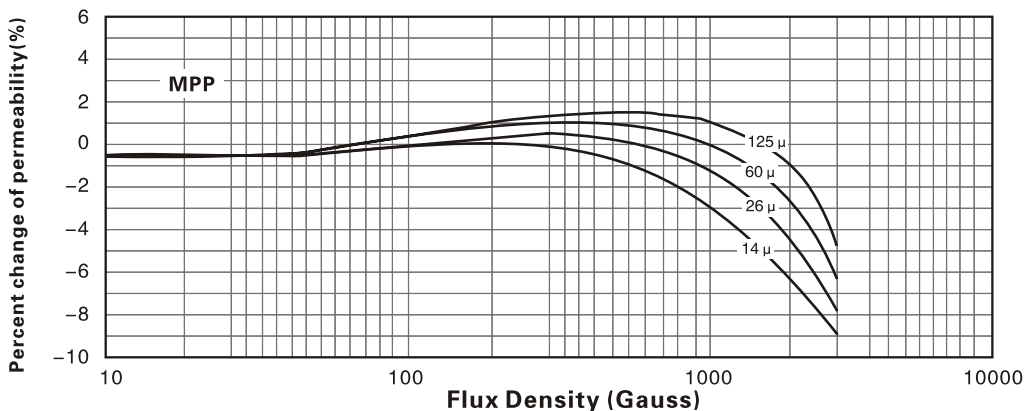

ALLOY POWDER CORE SERIES PRODUCTS

Material Characteristics Curves

Permeability vs.Frequency


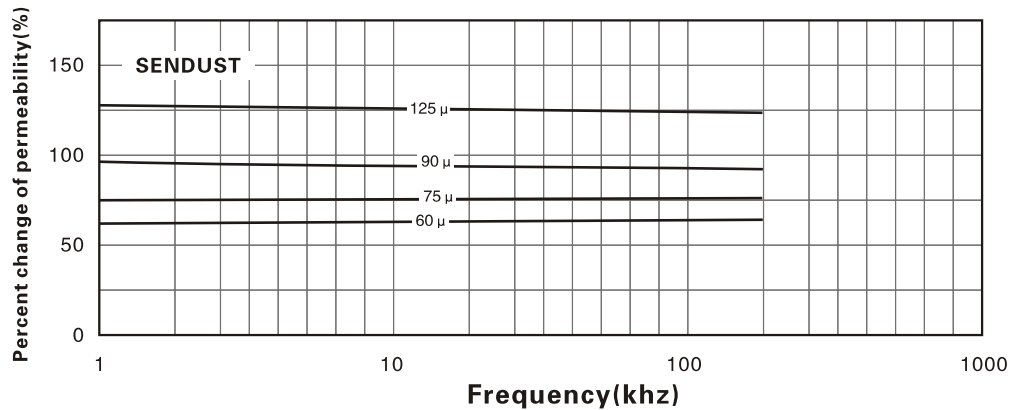
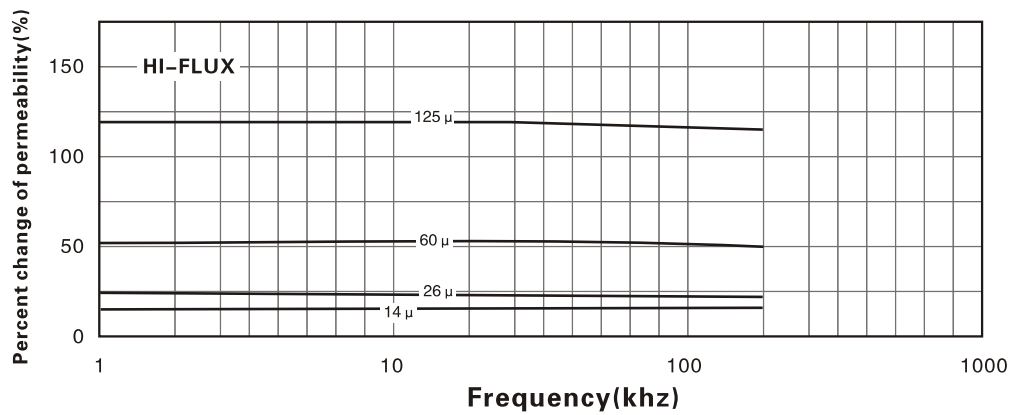
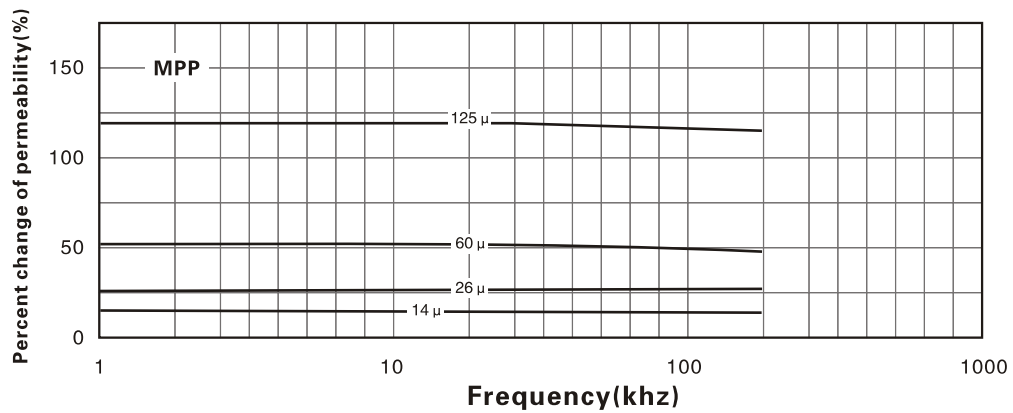


ALLOY POWDER CORE SERIES PRODUCTS

Material Characteristics Curves

E Type Cores

Core Loss vs. Flux Density

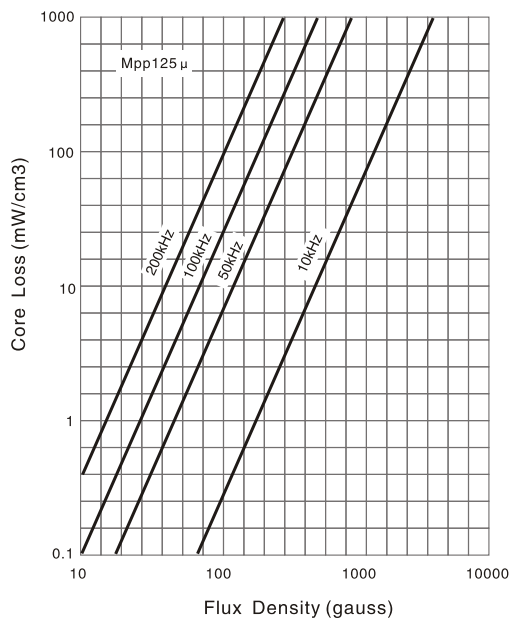
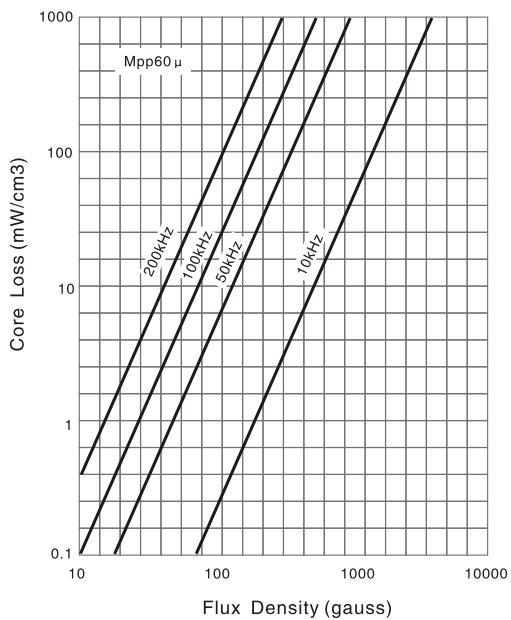
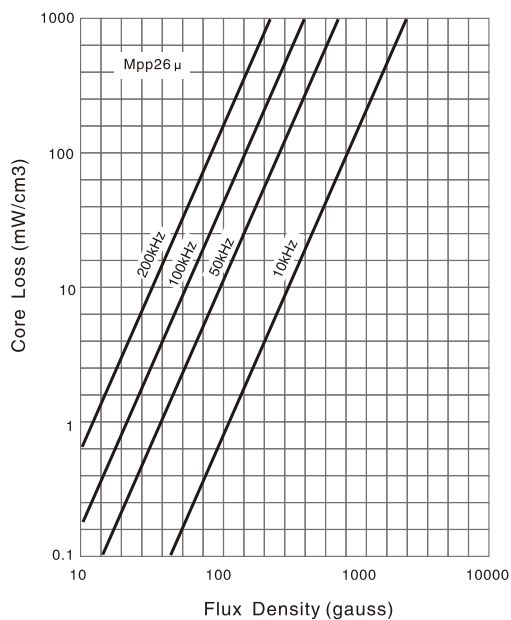
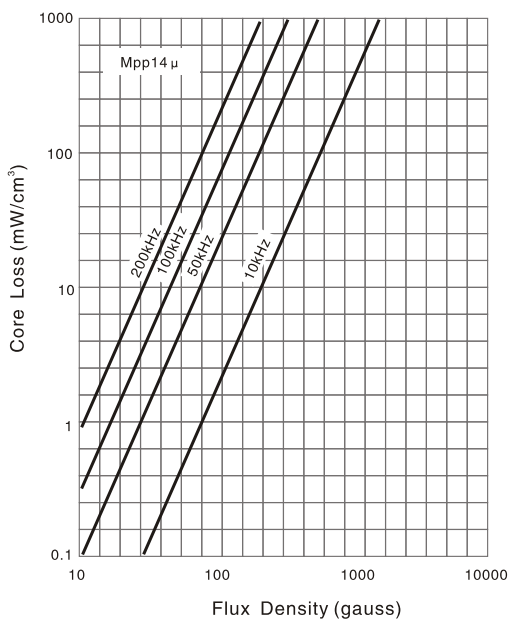


ALLOY POWDER CORE SERIES PRODUCTS

Material Characteristics Curves

E Type Cores

Core Loss vs. Flux Density

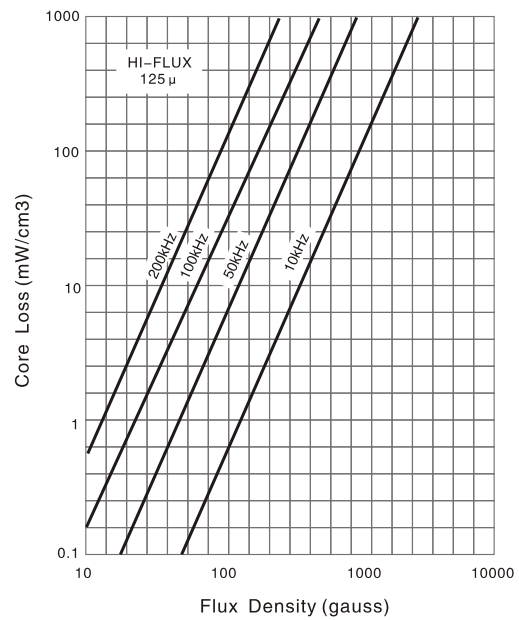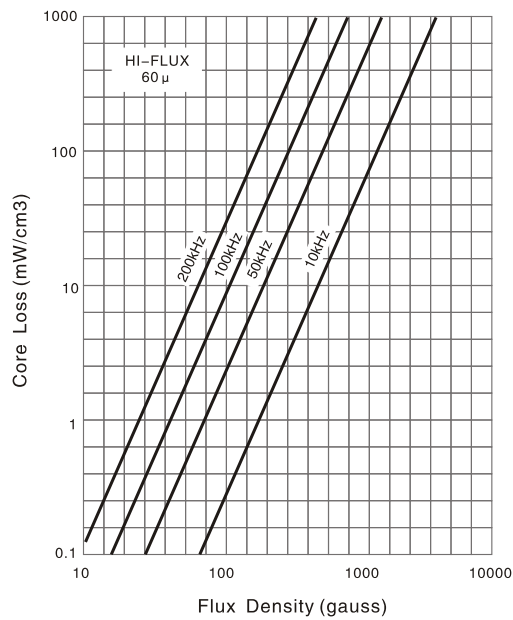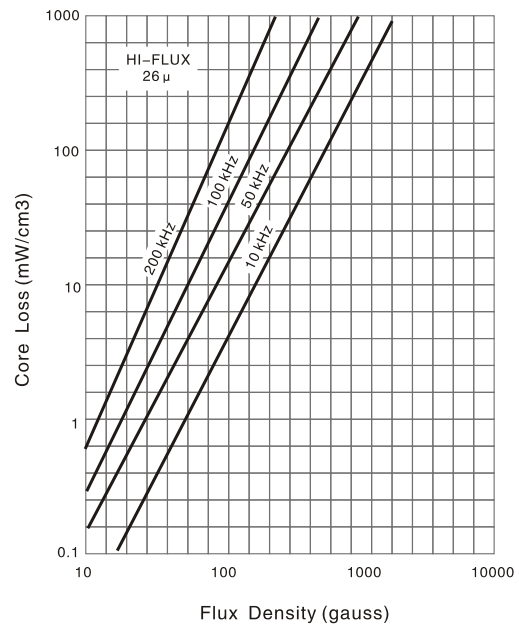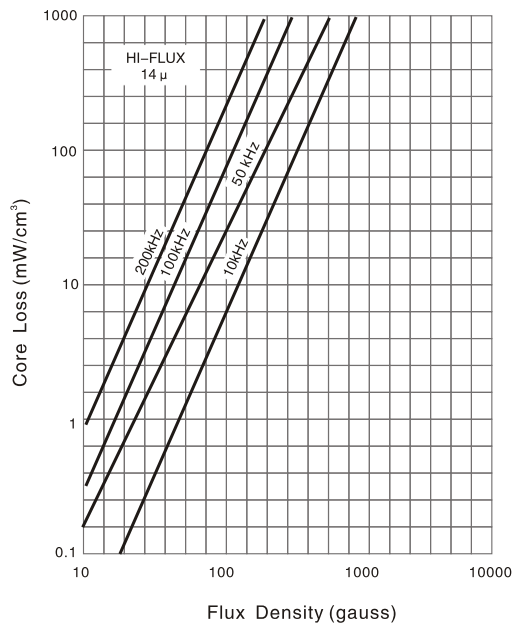



ALLOY POWDER CORE SERIES PRODUCTS

Material Characteristics Curves

E Type Cores

Core Loss vs. Flux Density

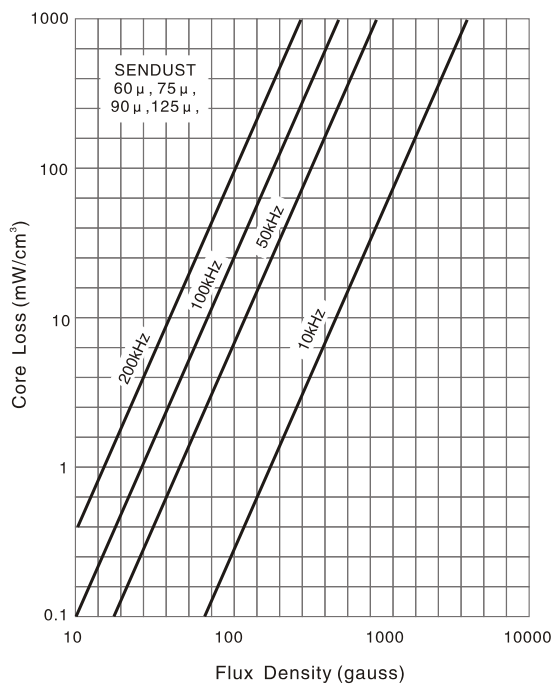


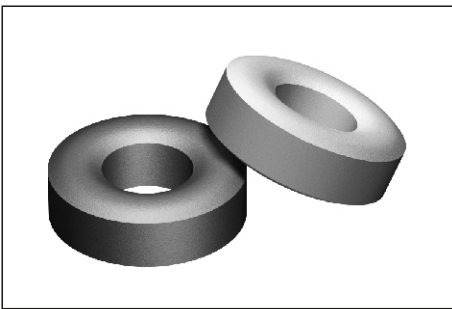

ALLOY POWDER CORE SERIES PRODUCTS

Toroidal Cores


TYPICAL PART No.

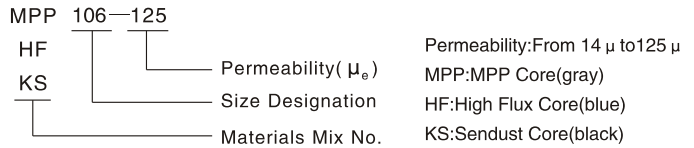

STANDARD SPECIFICATIONS

| Part No. MPP-XXX-XX HF-XXX-XX KS-XXX-XX | A_L nH/N ² | Dimensions (Bare) | | | Dimensions (Coated) | | | Le cm | Ae cm ² | Ve cm ³ |
|--|----------------------------|-------------------|----------|----------|---------------------|---------------|---------------|----------|-----------------------|-----------------------|
| | | OD mm | ID mm | HT mm | OD mm(Max) | ID mm(Min) | HT mm(Max) | | | |
| 031-14 | 6 | 7.87 | 3.96 | 3.18 | 8.51 | 3.43 | 3.81 | 1.787 | 0.062 | 0.11 |
| 031-26 | 11 | 7.87 | 3.96 | 3.18 | 8.51 | 3.43 | 3.81 | 1.787 | 0.062 | 0.11 |
| 031-60 | 25 | 7.87 | 3.96 | 3.18 | 8.51 | 3.43 | 3.81 | 1.787 | 0.062 | 0.11 |
| 031-75 | 31 | 7.87 | 3.96 | 3.18 | 8.51 | 3.43 | 3.81 | 1.787 | 0.062 | 0.11 |
| 031-90 | 37 | 7.87 | 3.96 | 3.18 | 8.51 | 3.43 | 3.81 | 1.787 | 0.062 | 0.11 |
| 031-125 | 52 | 7.87 | 3.96 | 3.18 | 8.51 | 3.43 | 3.81 | 1.787 | 0.062 | 0.11 |
| 038-26 | 14 | 9.65 | 4.78 | 3.96 | 10.29 | 4.27 | 4.60 | 2.180 | 0.094 | 0.206 |
| 038-60 | 32 | 9.65 | 4.78 | 3.96 | 10.29 | 4.27 | 4.60 | 2.180 | 0.094 | 0.206 |
| 038-75 | 40 | 9.65 | 4.78 | 3.96 | 10.29 | 4.27 | 4.60 | 2.180 | 0.094 | 0.206 |
| 038-90 | 48 | 9.65 | 4.78 | 3.96 | 10.29 | 4.27 | 4.60 | 2.180 | 0.094 | 0.206 |
| 038-125 | 66 | 9.65 | 4.78 | 3.96 | 10.29 | 4.27 | 4.60 | 2.180 | 0.094 | 0.206 |
| 039-14 | 6 | 9.65 | 4.78 | 3.18 | 10.29 | 4.27 | 3.81 | 2.177 | 0.075 | 0.164 |
| 039-26 | 11 | 9.65 | 4.78 | 3.18 | 10.29 | 4.27 | 3.81 | 2.177 | 0.075 | 0.164 |
| 039-60 | 25 | 9.65 | 4.78 | 3.18 | 10.29 | 4.27 | 3.81 | 2.177 | 0.075 | 0.164 |
| 039-75 | 32 | 9.65 | 4.78 | 3.18 | 10.29 | 4.27 | 3.81 | 2.177 | 0.075 | 0.164 |
| 039-90 | 38 | 9.65 | 4.78 | 3.18 | 10.29 | 4.27 | 3.81 | 2.177 | 0.075 | 0.164 |
| 039-125 | 53 | 9.65 | 4.78 | 3.18 | 10.29 | 4.27 | 3.81 | 2.177 | 0.075 | 0.164 |
| 040-14 | 7 | 10.16 | 5.08 | 3.96 | 10.80 | 4.57 | 4.57 | 2.38 | 0.100 | 0.238 |
| 040-26 | 14 | 10.16 | 5.08 | 3.96 | 10.80 | 4.57 | 4.57 | 2.38 | 0.100 | 0.238 |
| 040-60 | 32 | 10.16 | 5.08 | 3.96 | 10.80 | 4.57 | 4.57 | 2.38 | 0.100 | 0.238 |
| 040-75 | 40 | 10.16 | 5.08 | 3.96 | 10.80 | 4.57 | 4.57 | 2.38 | 0.100 | 0.238 |
| 040-90 | 48 | 10.16 | 5.08 | 3.96 | 10.80 | 4.57 | 4.57 | 2.38 | 0.100 | 0.238 |
| 040-125 | 66 | 10.16 | 5.08 | 3.96 | 10.80 | 4.57 | 4.57 | 2.38 | 0.100 | 0.238 |

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



Le: Mean Magnetic Path length

Ae: Cross Section Area


Ve: Core Volume

Operating temperature range: -55°C~+125°C


A_L Test condition: 10kHz, 1mT

ALLOY POWDER CORE SERIES PRODUCTS

Toroidal Cores

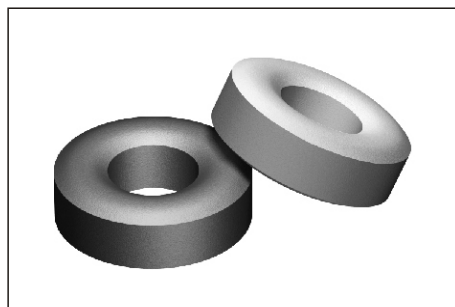


TYPICAL PART No.

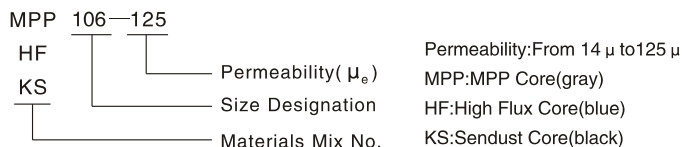


STANDARD SPECIFICATIONS

| Part No. MPP-XXX-XX HF-XXX-XX KS-XXX-XX | A_L nH/N ² | Dimensions (Bare) | | | Dimensions (Coated) | | | L cm | A cm ² | V cm ³ |
|--|----------------------------|-------------------|----------|----------|---------------------|---------------|---------------|---------|----------------------|----------------------|
| | | OD mm | ID mm | HT mm | OD mm(Max) | ID mm(Min) | HT mm(Max) | | | |
| 050-14 | 6.4 | 12.7 | 7.62 | 4.75 | 13.46 | 6.99 | 5.51 | 3.124 | 0.114 | 0.356 |
| 050-26 | 12 | 12.7 | 7.62 | 4.75 | 13.46 | 6.99 | 5.51 | 3.124 | 0.114 | 0.356 |
| 050-60 | 27 | 12.7 | 7.62 | 4.75 | 13.46 | 6.99 | 5.51 | 3.124 | 0.114 | 0.356 |
| 050-75 | 34 | 12.7 | 7.62 | 4.75 | 13.46 | 6.99 | 5.51 | 3.124 | 0.114 | 0.356 |
| 050-90 | 40 | 12.7 | 7.62 | 4.75 | 13.46 | 6.99 | 5.51 | 3.124 | 0.114 | 0.356 |
| 050-125 | 56 | 12.7 | 7.62 | 4.75 | 13.46 | 6.99 | 5.51 | 3.124 | 0.114 | 0.356 |
| 065-14 | 8 | 16.51 | 10.16 | 6.35 | 17.40 | 9.53 | 7.11 | 4.11 | 0.192 | 0.789 |
| 065-26 | 15 | 16.51 | 10.16 | 6.35 | 17.40 | 9.53 | 7.11 | 4.11 | 0.192 | 0.789 |
| 065-60 | 35 | 16.51 | 10.16 | 6.35 | 17.40 | 9.53 | 7.11 | 4.11 | 0.192 | 0.789 |
| 065-75 | 43 | 16.51 | 10.16 | 6.35 | 17.40 | 9.53 | 7.11 | 4.11 | 0.192 | 0.789 |
| 065-90 | 52 | 16.51 | 10.16 | 6.35 | 17.40 | 9.53 | 7.11 | 4.11 | 0.192 | 0.789 |
| 065-125 | 72 | 16.51 | 10.16 | 6.35 | 17.40 | 9.53 | 7.11 | 4.11 | 0.192 | 0.789 |
| 068-14 | 10 | 17.27 | 9.65 | 6.35 | 18.03 | 9.02 | 7.11 | 4.14 | 0.232 | 0.961 |
| 068-26 | 19 | 17.27 | 9.65 | 6.35 | 18.03 | 9.02 | 7.11 | 4.14 | 0.232 | 0.961 |
| 068-60 | 43 | 17.27 | 9.65 | 6.35 | 18.03 | 9.02 | 7.11 | 4.14 | 0.232 | 0.961 |
| 068-75 | 53 | 17.27 | 9.65 | 6.35 | 18.03 | 9.02 | 7.11 | 4.14 | 0.232 | 0.961 |
| 068-90 | 64 | 17.27 | 9.65 | 6.35 | 18.03 | 9.02 | 7.11 | 4.14 | 0.232 | 0.961 |
| 068-125 | 89 | 17.27 | 9.65 | 6.35 | 18.03 | 9.02 | 7.11 | 4.14 | 0.232 | 0.961 |
| 080-26 | 14 | 20.30 | 12.70 | 6.35 | 21.10 | 12.07 | 7.11 | 5.090 | 0.226 | 1.150 |
| 080-35 | 19 | 20.30 | 12.70 | 6.35 | 21.10 | 12.07 | 7.11 | 5.090 | 0.226 | 1.150 |
| 080-60 | 32 | 20.30 | 12.70 | 6.35 | 21.10 | 12.07 | 7.11 | 5.090 | 0.226 | 1.150 |
| 080-75 | 41 | 20.30 | 12.70 | 6.35 | 21.10 | 12.07 | 7.11 | 5.090 | 0.226 | 1.150 |
| 080-90 | 49 | 20.30 | 12.70 | 6.35 | 21.10 | 12.07 | 7.11 | 5.090 | 0.226 | 1.150 |
| 080-125 | 68 | 20.30 | 12.70 | 6.35 | 21.10 | 12.07 | 7.11 | 5.090 | 0.226 | 1.150 |

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



Le: Mean Magnetic Path length
 Ae: Cross Section Area
 Ve: Core Volume
 Operating temperature range: -55°C~+125°C
 A_L Test condition: 10kHz, 1mT

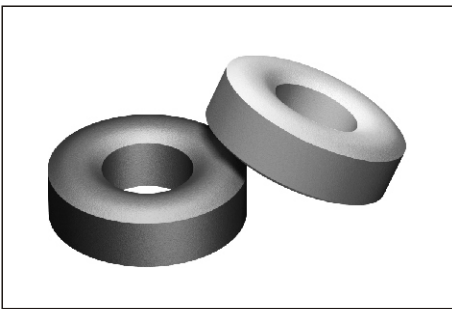

ALLOY POWDER CORE SERIES PRODUCTS

Toroidal Cores

TYPICAL PART No.

MPP 106-125
 HF
 KS


Permeability (μ_e)
 Size Designation
 Materials Mix No.

Permeability: From 14 μ to 125 μ
 MPP: MPP Core (gray)
 HF: High Flux Core (blue)
 KS: Sendust Core (black)

STANDARD SPECIFICATIONS

| Part No. MPP-XXX-XX HF-XXX-XX KS-XXX-XX | A_L nH/N ² | Dimensions (Bare) | | | Dimensions (Coated) | | | L cm | A cm ² | V cm ³ |
|--|----------------------------|-------------------|----------|----------|---------------------|---------------|---------------|---------|----------------------|----------------------|
| | | OD mm | ID mm | HT mm | OD mm(Max) | ID mm(Min) | HT mm(Max) | | | |
| 090-26 | 19 | 22.90 | 14.00 | 7.62 | 23.62 | 13.39 | 8.38 | 5.670 | 0.331 | 1.880 |
| 090-35 | 25 | 22.90 | 14.00 | 7.62 | 23.62 | 13.39 | 8.38 | 5.670 | 0.331 | 1.880 |
| 090-60 | 43 | 22.90 | 14.00 | 7.62 | 23.62 | 13.39 | 8.38 | 5.670 | 0.331 | 1.880 |
| 090-75 | 54 | 22.90 | 14.00 | 7.62 | 23.62 | 13.39 | 8.38 | 5.670 | 0.331 | 1.880 |
| 090-90 | 65 | 22.90 | 14.00 | 7.62 | 23.62 | 13.39 | 8.38 | 5.670 | 0.331 | 1.880 |
| 090-125 | 90 | 22.90 | 14.00 | 7.62 | 23.62 | 13.39 | 8.38 | 5.670 | 0.331 | 1.880 |
| 092-26 | 22 | 23.60 | 14.40 | 8.89 | 24.30 | 13.77 | 9.70 | 5.880 | 0.388 | 2.280 |
| 092-35 | 30 | 23.60 | 14.40 | 8.89 | 24.30 | 13.77 | 9.70 | 5.880 | 0.388 | 2.280 |
| 092-60 | 51 | 23.60 | 14.40 | 8.89 | 24.30 | 13.77 | 9.70 | 5.880 | 0.388 | 2.280 |
| 092-75 | 63 | 23.60 | 14.40 | 8.89 | 24.30 | 13.77 | 9.70 | 5.880 | 0.388 | 2.280 |
| 092-90 | 76 | 23.60 | 14.40 | 8.89 | 24.30 | 13.77 | 9.70 | 5.880 | 0.388 | 2.280 |
| 092-125 | 105 | 23.60 | 14.40 | 8.89 | 24.30 | 13.77 | 9.70 | 5.880 | 0.388 | 2.280 |
| 106-26 | 32 | 26.90 | 14.70 | 11.20 | 27.70 | 14.10 | 11.99 | 0.635 | 0.654 | 4.150 |
| 106-35 | 45 | 26.90 | 14.70 | 11.20 | 27.70 | 14.10 | 11.99 | 0.635 | 0.654 | 4.150 |
| 106-60 | 75 | 26.90 | 14.70 | 11.20 | 27.70 | 14.10 | 11.99 | 0.635 | 0.654 | 4.150 |
| 106-75 | 94 | 26.90 | 14.70 | 11.20 | 27.70 | 14.10 | 11.99 | 0.635 | 0.654 | 4.150 |
| 106-90 | 113 | 26.90 | 14.70 | 11.20 | 27.70 | 14.10 | 11.99 | 0.635 | 0.654 | 4.150 |
| 106-125 | 157 | 26.90 | 14.70 | 11.20 | 27.70 | 14.10 | 11.99 | 0.635 | 0.654 | 4.150 |
| 107-26 | 26 | 26.90 | 14.70 | 8.64 | 27.70 | 14.10 | 9.45 | 6.352 | 0.497 | 3.1551 |
| 107-60 | 59 | 26.90 | 14.70 | 8.64 | 27.70 | 14.10 | 9.45 | 6.352 | 0.497 | 3.1551 |
| 107-75 | 74 | 26.90 | 14.70 | 8.64 | 27.70 | 14.10 | 9.45 | 6.352 | 0.497 | 3.1551 |
| 107-90 | 89 | 26.90 | 14.70 | 8.64 | 27.70 | 14.10 | 9.45 | 6.352 | 0.497 | 3.1551 |
| 107-125 | 123 | 26.90 | 14.70 | 8.64 | 27.70 | 14.10 | 9.45 | 6.352 | 0.497 | 3.1551 |

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



L_e : Mean Magnetic Path length

A_e : Cross Section Area

V_e : Core Volume

Operating temperature range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

A_L Test condition: 10kHz, 1mT

ALLOY POWDER CORE SERIES PRODUCTS

Toroidal Cores

TYPICAL PART No.

MPP 106—125

HF

KS

Permeability(μ_e)

Size Designation


Materials Mix No.

Permeability:From 14 μ to125 μ

MPP:MPP Core(gray)

HF:High Flux Core(blue)


KS:Sendust Core(black)

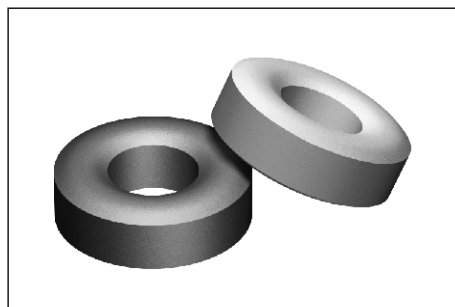

STANDARD SPECIFICATIONS

| Part No. MPP-XXX-XX HF-XXX-XX KS-XXX-XX | A_L nH/N ² | Dimensions (Bare) | | | Dimensions (Coated) | | | L cm | A cm ² | V cm ³ |
|--|----------------------------|-------------------|----------|----------|---------------------|---------------|---------------|---------|----------------------|----------------------|
| | | OD mm | ID mm | HT mm | OD mm(Max) | ID mm(Min) | HT mm(Max) | | | |
| 130-26 | 28 | 33.00 | 19.90 | 10.70 | 33.83 | 19.30 | 11.61 | 8.150 | 0.672 | 5.480 |
| 130-35 | 36 | 33.00 | 19.90 | 10.70 | 33.83 | 19.30 | 11.61 | 8.150 | 0.672 | 5.480 |
| 130-60 | 61 | 33.00 | 19.90 | 10.70 | 33.83 | 19.30 | 11.61 | 8.150 | 0.672 | 5.480 |
| 130-75 | 76 | 33.00 | 19.90 | 10.70 | 33.83 | 19.30 | 11.61 | 8.150 | 0.672 | 5.480 |
| 130-90 | 91 | 33.00 | 19.90 | 10.70 | 33.83 | 19.30 | 11.61 | 8.150 | 0.672 | 5.480 |
| 130-125 | 127 | 33.00 | 19.90 | 10.70 | 33.83 | 19.30 | 11.61 | 8.150 | 0.672 | 5.480 |
| 131-26 | 22 | 33.00 | 19.90 | 8.76 | 33.83 | 19.30 | 9.70 | 8.147 | 0.551 | 4.490 |
| 131-60 | 51 | 33.00 | 19.90 | 8.76 | 33.83 | 19.30 | 9.70 | 8.147 | 0.551 | 4.490 |
| 131-75 | 64 | 33.00 | 19.90 | 8.76 | 33.83 | 19.30 | 9.70 | 8.147 | 0.551 | 4.490 |
| 131-90 | 76.5 | 33.00 | 19.90 | 8.76 | 33.83 | 19.30 | 9.70 | 8.147 | 0.551 | 4.490 |
| 131-125 | 109 | 33.00 | 19.90 | 8.76 | 33.83 | 19.30 | 9.70 | 8.147 | 0.551 | 4.490 |
| 132-26 | 28 | 33.0 | 19.90 | 11.18 | 33.83 | 19.30 | 11.99 | 8.147 | 0.698 | 5.687 |
| 132-60 | 65 | 33.0 | 19.90 | 11.18 | 33.83 | 19.30 | 11.99 | 8.147 | 0.698 | 5.687 |
| 132-75 | 81 | 33.0 | 19.90 | 11.18 | 33.83 | 19.30 | 11.99 | 8.147 | 0.698 | 5.687 |
| 132-90 | 97 | 33.0 | 19.90 | 11.18 | 33.83 | 19.30 | 11.99 | 8.147 | 0.698 | 5.687 |
| 132-125 | 135 | 33.0 | 19.90 | 11.18 | 33.83 | 19.30 | 11.99 | 8.147 | 0.698 | 5.687 |
| 135-26 | 16 | 34.30 | 23.40 | 8.89 | 35.10 | 22.56 | 9.83 | 8.950 | 0.454 | 4.060 |
| 135-35 | 22 | 34.30 | 23.40 | 8.89 | 35.10 | 22.56 | 9.83 | 8.950 | 0.454 | 4.060 |
| 135-60 | 38 | 34.30 | 23.40 | 8.89 | 35.10 | 22.56 | 9.83 | 8.950 | 0.454 | 4.060 |
| 135-75 | 47 | 34.30 | 23.40 | 8.89 | 35.10 | 22.56 | 9.83 | 8.950 | 0.454 | 4.060 |
| 135-90 | 57 | 34.30 | 23.40 | 8.89 | 35.10 | 22.56 | 9.83 | 8.950 | 0.454 | 4.060 |
| 135-125 | 79 | 34.30 | 23.40 | 8.89 | 35.10 | 22.56 | 9.83 | 8.950 | 0.454 | 4.060 |

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS




L_e : Mean Magnetic Path length

A_e : Cross Section Area

V_e : Core Volume

Operating temperature range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$


A_L Test condition: 10kHz, 1mT

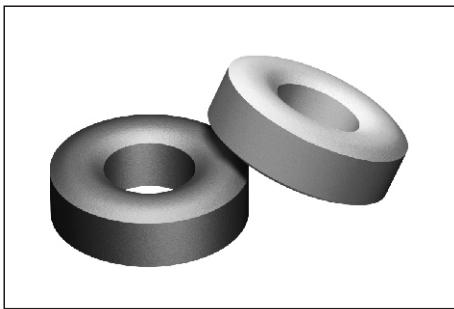

ALLOY POWDER CORE SERIES PRODUCTS

Toroidal Cores


TYPICAL PART No.

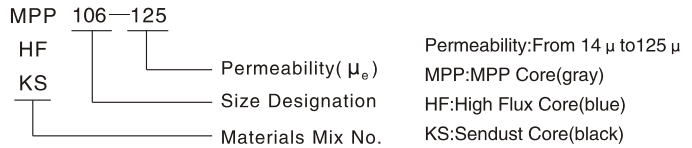

STANDARD SPECIFICATIONS

| Part No. MPP-XXX-XX HF-XXX-XX KS-XXX-XX | A_L nH/N ² | Dimensions (Bare) | | | Dimensions (Coated) | | | L cm | A cm ² | V cm ³ |
|--|----------------------------|-------------------|----------|----------|---------------------|---------------|---------------|---------|----------------------|----------------------|
| | | OD mm | ID mm | HT mm | OD mm(Max) | ID mm(Min) | HT mm(Max) | | | |
| 141-26 | 24 | 35.80 | 22.40 | 10.50 | 36.63 | 21.54 | 11.28 | 0.678 | 6.088 | 3.640 |
| 141-35 | 33 | 35.80 | 22.40 | 10.50 | 36.63 | 21.54 | 11.28 | 0.678 | 6.088 | 3.640 |
| 141-60 | 56 | 35.80 | 22.40 | 10.50 | 36.63 | 21.54 | 11.28 | 0.678 | 6.088 | 3.640 |
| 141-75 | 70 | 35.80 | 22.40 | 10.50 | 36.63 | 21.54 | 11.28 | 0.678 | 6.088 | 3.640 |
| 141-90 | 84 | 35.80 | 22.40 | 10.50 | 36.63 | 21.54 | 11.28 | 0.678 | 6.088 | 3.640 |
| 141-125 | 117 | 35.80 | 22.40 | 10.50 | 36.63 | 21.54 | 11.28 | 0.678 | 6.088 | 3.640 |
| 157-26 | 35 | 39.90 | 24.10 | 14.50 | 40.72 | 23.30 | 15.37 | 9.840 | 1.072 | 10.500 |
| 157-35 | 48 | 39.90 | 24.10 | 14.50 | 40.72 | 23.30 | 15.37 | 9.840 | 1.072 | 10.500 |
| 157-60 | 81 | 39.90 | 24.10 | 14.50 | 40.72 | 23.30 | 15.37 | 9.840 | 1.072 | 10.500 |
| 157-75 | 101 | 39.90 | 24.10 | 14.50 | 40.72 | 23.30 | 15.37 | 9.840 | 1.072 | 10.500 |
| 157-90 | 121 | 39.90 | 24.10 | 14.50 | 40.72 | 23.30 | 15.37 | 9.840 | 1.072 | 10.500 |
| 157-125 | 168 | 39.90 | 24.10 | 14.50 | 40.72 | 23.30 | 15.37 | 9.840 | 1.072 | 10.500 |
| 168-26 | 47 | 42.90 | 24.20 | 16.26 | 44.00 | 23.30 | 17.16 | 10.261 | 1.475 | 15.741 |
| 168-35 | 63 | 42.90 | 24.20 | 16.26 | 44.00 | 23.30 | 17.16 | 10.261 | 1.475 | 15.741 |
| 168-60 | 108 | 42.90 | 24.20 | 16.26 | 44.00 | 23.30 | 17.16 | 10.261 | 1.475 | 15.741 |
| 168-75 | 135 | 42.90 | 24.20 | 16.26 | 44.00 | 23.30 | 17.16 | 10.261 | 1.475 | 15.741 |
| 168-90 | 161 | 42.90 | 24.20 | 16.26 | 44.00 | 23.30 | 17.16 | 10.261 | 1.475 | 15.741 |
| 168-125 | 224 | 42.90 | 24.20 | 16.26 | 44.00 | 23.30 | 17.16 | 10.261 | 1.475 | 15.741 |
| 184-26 | 59 | 46.70 | 24.10 | 18.00 | 47.63 | 23.32 | 18.92 | 10.740 | 1.990 | 21.300 |
| 184-35 | 80 | 46.70 | 24.10 | 18.00 | 47.63 | 23.32 | 18.92 | 10.740 | 1.990 | 21.300 |
| 184-60 | 135 | 46.70 | 24.10 | 18.00 | 47.63 | 23.32 | 18.92 | 10.740 | 1.990 | 21.300 |
| 184-75 | 169 | 46.70 | 24.10 | 18.00 | 47.63 | 23.32 | 18.92 | 10.740 | 1.990 | 21.300 |
| 184-90 | 202 | 46.70 | 24.10 | 18.00 | 47.63 | 23.32 | 18.92 | 10.740 | 1.990 | 21.300 |
| 184-125 | 281 | 46.70 | 24.10 | 18.00 | 47.63 | 23.32 | 18.92 | 10.740 | 1.990 | 21.300 |

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



L_e : Mean Magnetic Path length

A_e : Cross Section Area


V_e : Core Volume

Operating temperature range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$


A_L Test condition: 10kHz, 1mT

ALLOY POWDER CORE SERIES PRODUCTS

Toroidal Cores

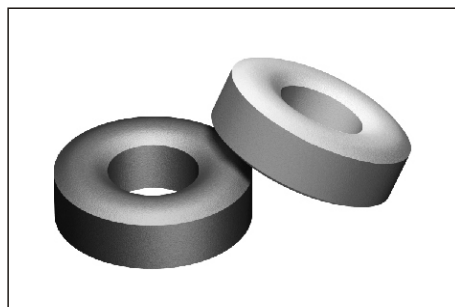


TYPICAL PART No.

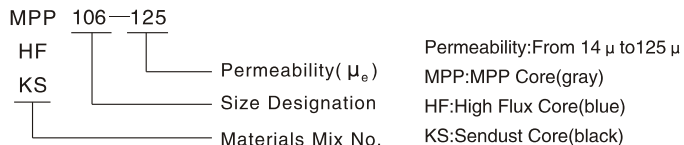


STANDARD SPECIFICATIONS

| Part No. MPP-XXX-XX HF-XXX-XX KS-XXX-XX | A_L nH/N ² | Dimensions (Bare) | | | Dimensions (Coated) | | | L cm | A cm ² | V cm ³ |
|--|----------------------------|-------------------|----------|----------|---------------------|---------------|---------------|---------|----------------------|----------------------|
| | | OD mm | ID mm | HT mm | OD mm(Max) | ID mm(Min) | HT mm(Max) | | | |
| 185-26 | 37 | 46.70 | 28.70 | 15.20 | 47.63 | 27.89 | 16.13 | 11.630 | 1.340 | 15.580 |
| 185-35 | 50 | 46.70 | 28.70 | 15.20 | 47.63 | 27.89 | 16.13 | 11.630 | 1.340 | 15.580 |
| 185-60 | 86 | 46.70 | 28.70 | 15.20 | 47.63 | 27.89 | 16.13 | 11.630 | 1.340 | 15.580 |
| 185-75 | 107 | 46.70 | 28.70 | 15.20 | 47.63 | 27.89 | 16.13 | 11.630 | 1.340 | 15.580 |
| 185-90 | 128 | 46.70 | 28.70 | 15.20 | 47.63 | 27.89 | 16.13 | 11.630 | 1.340 | 15.580 |
| 185-125 | 178 | 46.70 | 28.70 | 15.20 | 47.63 | 27.89 | 16.13 | 11.630 | 1.340 | 15.580 |
| 200-26 | 32 | 50.80 | 31.80 | 13.50 | 51.69 | 30.94 | 14.35 | 12.730 | 1.251 | 15.930 |
| 200-35 | 43 | 50.80 | 31.80 | 13.50 | 51.69 | 30.94 | 14.35 | 12.730 | 1.251 | 15.930 |
| 200-60 | 73 | 50.80 | 31.80 | 13.50 | 51.69 | 30.94 | 14.35 | 12.730 | 1.251 | 15.930 |
| 200-75 | 91 | 50.80 | 31.80 | 13.50 | 51.69 | 30.94 | 14.35 | 12.730 | 1.251 | 15.930 |
| 200-90 | 109 | 50.80 | 31.80 | 13.50 | 51.69 | 30.94 | 14.35 | 12.730 | 1.251 | 15.930 |
| 200-125 | 152 | 50.80 | 31.80 | 13.50 | 51.69 | 30.94 | 14.35 | 12.730 | 1.251 | 15.930 |
| 225-26 | 33 | 57.20 | 35.60 | 14.00 | 58.00 | 34.70 | 14.86 | 14.300 | 1.444 | 20.650 |
| 225-35 | 44 | 57.20 | 35.60 | 14.00 | 58.00 | 34.70 | 14.86 | 14.300 | 1.444 | 20.650 |
| 225-60 | 75 | 57.20 | 35.60 | 14.00 | 58.00 | 34.70 | 14.86 | 14.300 | 1.444 | 20.650 |
| 225-75 | 94 | 57.20 | 35.60 | 14.00 | 58.00 | 34.70 | 14.86 | 14.300 | 1.444 | 20.650 |
| 225-90 | 112 | 57.20 | 35.60 | 14.00 | 58.00 | 34.70 | 14.86 | 14.300 | 1.444 | 20.650 |
| 225-125 | 156 | 57.20 | 35.60 | 14.00 | 58.00 | 34.70 | 14.86 | 14.300 | 1.444 | 20.650 |
| 226-26 | 60 | 57.20 | 26.40 | 15.20 | 58.00 | 25.60 | 16.10 | 12.500 | 2.290 | 28.600 |
| 226-35 | 81 | 57.20 | 26.40 | 15.20 | 58.00 | 25.60 | 16.10 | 12.500 | 2.290 | 28.600 |
| 226-60 | 138 | 57.20 | 26.40 | 15.20 | 58.00 | 25.60 | 16.10 | 12.500 | 2.290 | 28.600 |
| 226-75 | 172 | 57.20 | 26.40 | 15.20 | 58.00 | 25.60 | 16.10 | 12.500 | 2.290 | 28.600 |
| 226-90 | 207 | 57.20 | 26.40 | 15.20 | 58.00 | 25.60 | 16.10 | 12.500 | 2.290 | 28.600 |
| 226-125 | 287 | 57.20 | 26.40 | 15.20 | 58.00 | 25.60 | 16.10 | 12.500 | 2.290 | 28.600 |

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS




Le: Mean Magnetic Path length
 Ae: Cross Section Area
 Ve: Core Volume
 Operating temperature range: -55°C~+125°C
 A_L Test condition: 10kHz, 1mT

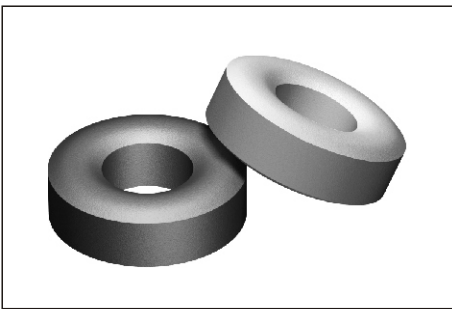

ALLOY POWDER CORE SERIES PRODUCTS

Toroidal Cores


TYPICAL PART No.

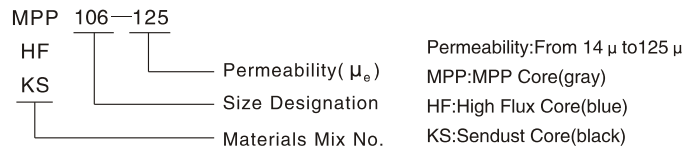

STANDARD SPECIFICATIONS

| Part No. MPP-XXX-XX HF-XXX-XX KS-XXX-XX | A_L nH/N ² | Dimensions (Bare) | | | Dimensions (Coated) | | | L cm | A cm ² | V cm ³ |
|--|----------------------------|-------------------|----------|----------|---------------------|---------------|---------------|---------|----------------------|----------------------|
| | | OD mm | ID mm | HT mm | OD mm(Max) | ID mm(Min) | HT mm(Max) | | | |
| 300-26 | 30 | 77.80 | 49.20 | 12.70 | 78.90 | 48.20 | 13.84 | 20.00 | 1.770 | 34.700 |
| 300-60 | 68 | 77.80 | 49.20 | 12.70 | 78.90 | 48.20 | 13.84 | 20.00 | 1.770 | 34.700 |
| 300-75 | 85 | 77.80 | 49.20 | 12.70 | 78.90 | 48.20 | 13.84 | 20.00 | 1.770 | 34.700 |
| 300-90 | 102 | 77.80 | 49.20 | 12.70 | 78.90 | 48.20 | 13.84 | 20.00 | 1.770 | 34.700 |
| 300-125 | 142 | 77.80 | 49.20 | 12.70 | 78.90 | 48.20 | 13.84 | 20.00 | 1.770 | 34.700 |
| 301-26 | 37 | 77.80 | 49.20 | 15.90 | 78.90 | 48.20 | 17.02 | 19.950 | 2.270 | 45.300 |
| 301-60 | 85 | 77.80 | 49.20 | 15.90 | 78.90 | 48.20 | 17.02 | 19.950 | 2.270 | 45.300 |
| 301-75 | 107 | 77.80 | 49.20 | 15.90 | 78.90 | 48.20 | 17.02 | 19.950 | 2.270 | 45.300 |
| 301-90 | 128 | 77.80 | 49.20 | 15.90 | 78.90 | 48.20 | 17.02 | 19.950 | 2.270 | 45.300 |
| 301-125 | 178 | 77.80 | 49.20 | 15.90 | 78.90 | 48.20 | 17.02 | 19.950 | 2.270 | 45.300 |

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



L_e : Mean Magnetic Path length

A_e : Cross Section Area

V_e : Core Volume

Operating temperature range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

A_L Test condition: 10kHz, 1mT



SENDUST CORES SERIES PRODUCTS

POT Cores

PC70


PHYSICAL SPECIFICATIONS

| Part No. | A ±0.5 | B ±0.5 | C ±0.5 | D ±0.5 | E ±0.5 | F ±0.5 | G ±0.5 | H ±0.5 | L ±0.5 |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| PC70-H55 | 70 | 27.5 | 34 | 61 | 35 | 8.5 | 20 | 55 | / |
| PC70-H60 | 70 | 30 | 39 | 61 | 35 | 8.5 | 20 | 60 | / |
| PC70-H65 | 70 | 32.5 | 44 | 61 | 35 | 8.5 | 20 | 65 | / |
| PC70-H70 | 70 | 35 | 49 | 61 | 35 | 8.5 | 20 | 70 | / |
| PC70-H75 | 70 | 37.5 | 54 | 61 | 35 | 8.5 | 20 | 75 | / |
| PC70-H80 | 70 | 40 | 59 | 61 | 35 | 8.5 | 20 | 80 | / |
| PC70-H85 | 70 | 42.5 | 64 | 61 | 35 | 8.5 | 20 | 85 | / |
| PC70-H90 | 70 | 45 | 69 | 61 | 35 | 8.5 | 20 | 90 | / |
| PC70-H95 | 70 | 47.5 | 74 | 61 | 35 | 8.5 | 20 | 95 | / |
| PC70-H100 | 70 | 50 | 79 | 61 | 35 | 8.5 | 20 | 100 | / |
| PC70-H105 | 70 | 42.5 | 84 | 61 | 35 | 8.5 | 20 | 105 | / |
| PC70-H110 | 70 | 55 | 89 | 61 | 35 | 8.5 | 20 | 110 | / |


ELECTRO MAGNETIC PROPERTIES

| Part No. | Le cm | Ae cm ² | Ve cm ³ | W cm ² | AL(nH/N ²) ± 15% | | | |
|-----------|----------|-----------------------|-----------------------|----------------------|------------------------------|------|------|------|
| | | | | | NF26 | NF35 | NF60 | NF75 |
| PC70-H55 | 13.28 | 9.53 | 126.51 | 9.18 | 254 | 362 | 412 | 536 |
| PC70-H60 | 14.25 | 9.44 | 134.47 | 10.53 | 245 | 312 | 356 | 462 |
| PC70-H65 | 15.22 | 9.37 | 142.56 | 11.88 | 217 | 277 | 316 | 410 |
| PC70-H70 | 16.19 | 9.32 | 150.84 | 13.23 | 195 | 248 | 283 | 367 |
| PC70-H75 | 17.16 | 9.27 | 159.03 | 14.58 | 177 | 225 | 257 | 334 |
| PC70-H80 | 18.13 | 9.24 | 167.48 | 15.93 | 164 | 207 | 236 | 303 |
| PC70-H85 | 19.10 | 9.21 | 175.85 | 17.28 | 151 | 190 | 217 | 285 |
| PC70-H90 | 20.07 | 9.18 | 184.20 | 18.63 | 143 | 178 | 203 | 263 |
| PC70-H95 | 21.04 | 9.16 | 192.68 | 19.98 | 133 | 168 | 191 | 248 |
| PC70-H100 | 22.01 | 9.14 | 201.13 | 21.33 | 125 | 157 | 179 | 233 |
| PC70-H105 | 22.98 | 9.12 | 209.53 | 22.68 | 118 | 149 | 170 | 220 |
| PC70-H110 | 23.95 | 9.11 | 218.14 | 24.03 | 112 | 141 | 160 | 208 |


TECHNICAL INFORMATION

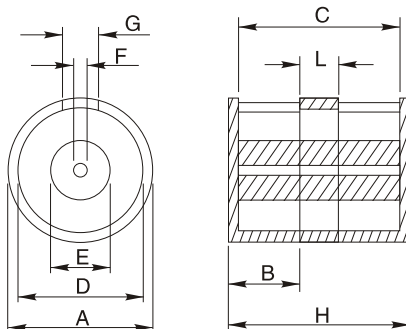

TYPICAL PART No.

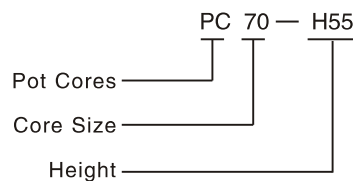

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume

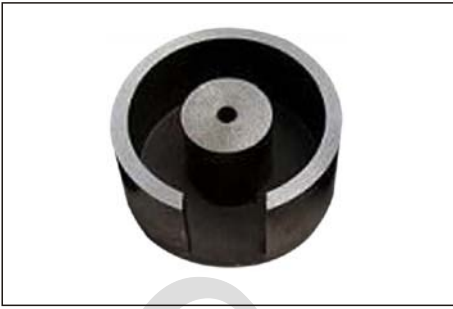

SENDUST CORES SERIES PRODUCTS

POT Cores

PC100


PHYSICAL SPECIFICATIONS

| Part No. | A ±0.5 | B ±0.5 | C ±0.5 | D ±0.5 | E ±0.5 | F ±0.5 | G ±0.5 | H ±0.5 | L ±0.5 |
|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| PC100-H50 | 100 | 25 | 29.5 | 87 | 40.5 | 8.5 | 35 | 50 | / |
| PC100-H60 | 100 | 30 | 39.5 | 87 | 40.5 | 8.5 | 35 | 60 | / |
| PC100-H70 | 100 | 35 | 49.5 | 87 | 40.5 | 8.5 | 35 | 70 | / |
| PC100-H80 | 100 | 40 | 59.5 | 87 | 40.5 | 8.5 | 35 | 80 | / |
| PC100-H90 | 100 | 45 | 69.5 | 87 | 40.5 | 8.5 | 35 | 90 | / |
| PC100-H100 | 100 | 50 | 79.5 | 87 | 40.5 | 8.5 | 35 | 100 | / |
| PC100-H110 | 100 | 40 | 89.5 | 87 | 40.5 | 8.5 | 35 | 110 | 30 |
| PC100-H120 | 100 | 40 | 99.5 | 87 | 40.5 | 8.5 | 35 | 120 | 40 |
| PC100-H130 | 100 | 50 | 109.5 | 87 | 40.5 | 8.5 | 35 | 130 | 30 |
| PC100-H140 | 100 | 50 | 119.5 | 87 | 40.5 | 8.5 | 35 | 140 | 40 |
| PC100-H150 | 100 | 50 | 129.5 | 87 | 40.5 | 8.5 | 35 | 150 | 50 |
| PC100-H160 | 100 | 50 | 139.5 | 87 | 40.5 | 8.5 | 35 | 160 | 60 |


ELECTRO MAGNETIC PROPERTIES

| Part No. | Le cm | Ae cm ² | Ve cm ³ | W cm ² | AL(nH/N ²) ± 15% | | | |
|------------|----------|-----------------------|-----------------------|----------------------|------------------------------|------|------|------|
| | | | | | NF26 | NF35 | NF60 | NF75 |
| PC100-H50 | 12.92 | 15.25 | 197.0 | 6.9 | 352 | 460 | 525 | 683 |
| PC100-H60 | 14.87 | 15.08 | 224.3 | 9.2 | 338 | 397 | 453 | 589 |
| PC100-H70 | 16.82 | 14.96 | 251.6 | 11.5 | 300 | 352 | 402 | 523 |
| PC100-H80 | 18.78 | 14.86 | 279.1 | 13.8 | 270 | 316 | 360 | 468 |
| PC100-H90 | 20.74 | 14.79 | 306.6 | 16.1 | 245 | 287 | 327 | 425 |
| PC100-H100 | 22.70 | 14.73 | 334.2 | 18.4 | 227 | 263 | 300 | 390 |
| PC100-H110 | 24.65 | 14.68 | 361.8 | 20.7 | 209 | 242 | 276 | 363 |
| PC100-H120 | 26.61 | 14.63 | 389.4 | 23.0 | 197 | 226 | 258 | 335 |
| PC100-H130 | 28.57 | 14.60 | 417.0 | 25.3 | 184 | 213 | 243 | 316 |
| PC100-H140 | 30.53 | 14.56 | 444.6 | 27.6 | 173 | 200 | 228 | 296 |
| PC100-H150 | 32.49 | 14.54 | 472.3 | 29.9 | 163 | 189 | 216 | 281 |
| PC100-H160 | 34.45 | 14.51 | 499.9 | 32.2 | 154 | 179 | 204 | 265 |

TECHNICAL INFORMATION

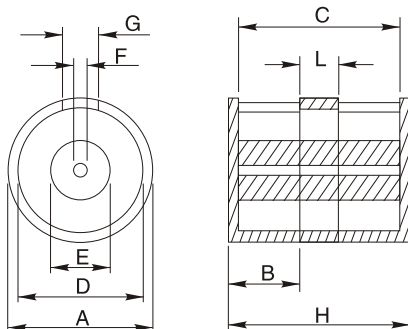

TYPICAL PART No.

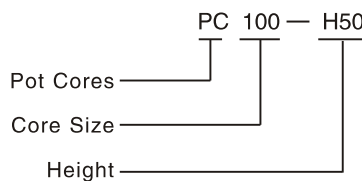

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume



SENDUST CORES SERIES PRODUCTS

POT Cores

PC120


PHYSICAL SPECIFICATIONS

| Part No. | A ±0.5 | B ±0.5 | C ±0.5 | D ±0.5 | E ±0.5 | F ±0.5 | G ±0.5 | H ±0.5 | L ±0.5 |
|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| PC120-H60 | 120 | 30 | 34.5 | 103 | 50.5 | 8.5 | 35 | 60 | / |
| PC120-H70 | 120 | 35 | 44.5 | 103 | 50.5 | 8.5 | 35 | 70 | / |
| PC120-H80 | 120 | 40 | 54.5 | 103 | 50.5 | 8.5 | 35 | 80 | / |
| PC120-H90 | 120 | 45 | 64.4 | 103 | 50.5 | 8.5 | 35 | 90 | / |
| PC120-H100 | 120 | 50 | 74.5 | 103 | 50.5 | 8.5 | 35 | 100 | / |
| PC120-H110 | 120 | 55 | 84.5 | 103 | 50.5 | 8.5 | 35 | 110 | / |
| PC120-H120 | 120 | 60 | 94.5 | 103 | 50.5 | 8.5 | 35 | 120 | / |
| PC120-H130 | 120 | 50 | 104.5 | 103 | 50.5 | 8.5 | 35 | 130 | 30 |
| PC120-H140 | 120 | 50 | 114.5 | 103 | 50.5 | 8.5 | 35 | 140 | 40 |
| PC120-H150 | 120 | 60 | 124.5 | 103 | 50.5 | 8.5 | 35 | 150 | 30 |
| PC120-H160 | 120 | 60 | 134.5 | 103 | 50.5 | 8.5 | 35 | 160 | 40 |
| PC120-H170 | 120 | 60 | 144.5 | 103 | 50.5 | 8.5 | 35 | 170 | 50 |
| PC120-H180 | 120 | 60 | 154.5 | 103 | 50.5 | 8.5 | 35 | 180 | 60 |


ELECTRO MAGNETIC PROPERTIES

| Part No. | Le cm | Ae cm ² | Ve cm ³ | W cm ² | AL(nH/N ²) ± 15% | | | |
|----------|----------|-----------------------|-----------------------|----------------------|------------------------------|------|------|------|
| | | | | | NF26 | NF35 | NF60 | NF75 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

TECHNICAL INFORMATION

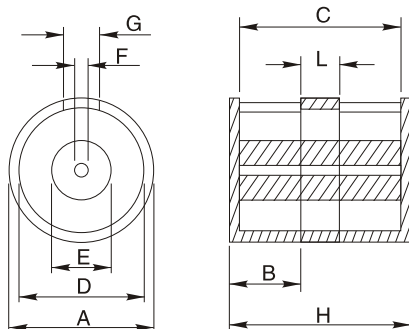

TYPICAL PART No.

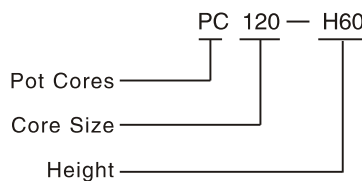

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume