



Rev.	Description	Date
A0	New release	2018.01.31

1. PHYSICAL CHARACTERISTICS (mm)

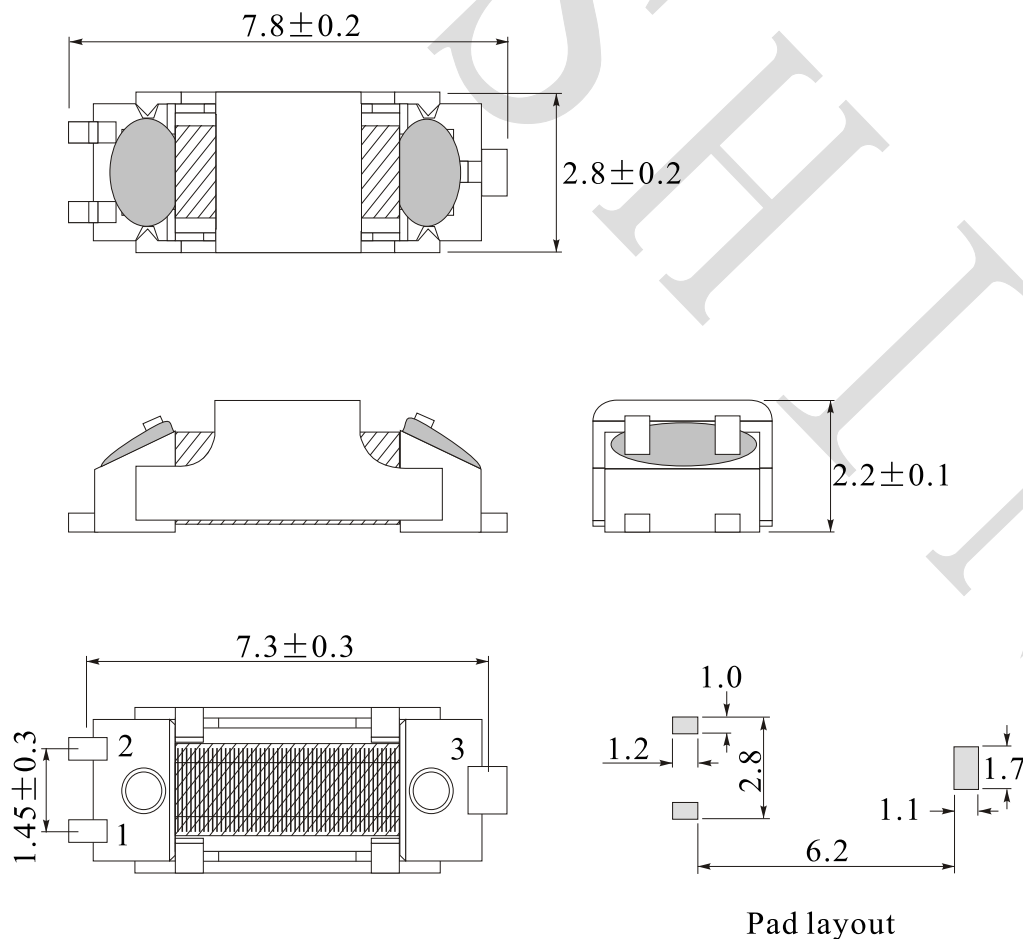

2. MEASURING CONDITION

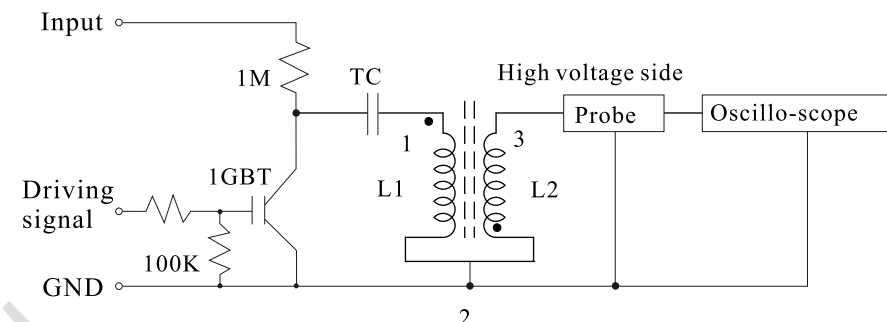

3. ELECTRONICAL SPECIFICATIONS

L(2-3): 7.15mH ± 20% @ 100KHz, 1V

L(1-2): 886nH ± 20% @ 100KHz, 1V

DCR(2-3): 324 Ω ± 20%

DCR(1-2): 785m Ω ± 20%

Output Voltage: -5.2KV ± 15% @ 300V input

Test Instrument:

L: HP4284A

RDC: HM2540

NOTES:

Temp 20°C 48%RH
RoHS Compliant

The Document property belong
to SHINHOM & is not allowed to be
duplicated without authorization

NAME:	Trigger coil		
CUSTOMER P/N:		DATE:	2018-01-31
SHINHOM P/N:	TCB7822	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD